

Conflict Packing yields linear vertex-kernels for ROOTED TRIPLET INCONSISTENCY and other problems *

Christophe Paul, Anthony Perez, Stéphan Thomassé
LIRMM - Université Montpellier 2, CNRS - FRANCE

Abstract

We develop a technique that we call *Conflict Packing* in the context of kernelization. We illustrate this technique on several well-studied problems: FEEDBACK ARC SET IN TOURNAMENTS, DENSE ROOTED TRIPLET INCONSISTENCY and BETWEENNESS IN TOURNAMENTS. For the former, one is given a tournament $T = (V, A)$ and seeks a set of at most k arcs whose reversal in T leads to an acyclic tournament. While a linear vertex-kernel is already known for this problem [6], using the Conflict Packing allows us to find a so-called *safe partition*, the central tool of the kernelization algorithm in [6], with simpler arguments. Regarding the DENSE ROOTED TRIPLET INCONSISTENCY problem, one is given a set of vertices V and a dense collection \mathcal{R} of rooted binary trees over three vertices of V and seeks a rooted tree over V containing all but at most k triplets from \mathcal{R} . Using again the Conflict Packing, we prove that the DENSE ROOTED TRIPLET INCONSISTENCY problem admits a linear vertex-kernel. This result improves the best known bound of $O(k^2)$ vertices for this problem [19]. Finally, we use this technique to obtain a linear vertex-kernel for BETWEENNESS IN TOURNAMENTS, where one is given a set of vertices V and a dense collection \mathcal{R} of *betweenness triplets* and seeks an ordering containing all but at most k triplets from \mathcal{R} . To the best of our knowledge this result constitutes the first polynomial kernel for the problem.

1 Introduction

The concept of *fixed parameter algorithms* [13] has been introduced to cope with NP-Hard problems. For a given (parameterized) problem, the goal is to identify a parameter k , independent from the data-size n , which captures the exponential growth of the complexity cost to solve the problem in hand. That is the complexity of such an (FPT) algorithm is $f(k) \cdot n^{O(1)}$, where f is an arbitrary computable function. As one of the most powerful techniques to design efficient fixed parameter algorithms, *kernelization algorithms* [7] have attracted a lot of attention during the last few years. A kernelization algorithm transforms, in polynomial time (via *reduction rules*), an arbitrary instance (I, k) of a parameterized problem into an equivalent instance (I', k') with the property that the parameter k' and the size $|I'|$ of the reduced instance only depend on k . The smaller the size of the reduced instance (called *kernel*) is, the faster the problem can be solved. Indeed, once reduced the instance can be efficiently tackled with any exact algorithms (e.g. bounded search tree or exponential time algorithms).

*Research supported by the AGAPE project (ANR-09-BLAN-0159) and the Phylariane project (ANR-08-EMER-011-01).

In the design of polynomial kernels, a few type of reduction rules are oftenly used. *Sunflower* rules or *domination* rules are classical reduction rules which locally affect the instance. These type of rules may be enough to obtain polynomial size kernels but linear kernels often require a more global "attack". More recently, reduction rules based on matching theory [28] or on bidimensionality theory [15] have been proposed. In this paper, we develop and push further a kernelization technique used for a few parameterized problems [9, 30], called *Conflict Packing*, which also uses matching arguments. Combined with a polynomial time algorithm that computes an accurate vertex partition (called *safe partition* in [6]), Conflict Packing yields linear vertex-kernels.

In this extended abstract, we illustrate the Conflict Packing technique on three parameterized problems. We first obtain a linear vertex-kernel for FEEDBACK ARC SET IN TOURNAMENTS: while such a kernel was already known to exist [6], our proofs are simpler and shorter. Then we obtain the main result of this paper, namely the first linear vertex-kernel for DENSE ROOTED TRIPLET INCONSISTENCY. Finally we apply the technique on BETWEENNESS IN TOURNAMENTS and obtain a linear vertex-kernel. No polynomial kernel was known before.

Feedback Arc Set in Tournaments (k -FAST) Let $T = (V, A)$ be a tournament on n vertices, *i.e.* a directed graph obtained from an arbitrary orientation of the complete (undirected) graph, and k be an integer. The task is to check whether there exists a subset of at most k arcs of A whose reversal transform T into an acyclic (*i.e.* transitive) tournament. In other words, k -FAST consists of computing a linear vertex ordering $v_1 \dots v_n$ having at most k *backward arcs* ($v_i \rightarrow v_j$ with $i > j$). It is well known that a tournament is transitive if and only if it does not contain a directed triangle (circuit on 3 vertices). k -FAST is a well studied problem from the combinatorial [14, 25] as well as from the algorithmic point of view [3, 23, 29]. It is known to be NP-complete [3, 11], but fixed parameter tractable [4, 22, 24]. The first kernelization algorithms for k -FAST [4, 12] yield $O(k^2)$ vertex-kernels. Recently, a linear vertex-kernel has been proposed [6]. More precisely, using a PTAS which computes a linear vertex ordering with at most $(1 + \epsilon)k$ backward arcs, the authors of [6] show how to find in polynomial time an ordered vertex partition, called *safe partition* \mathcal{P} , of T . Roughly speaking, a vertex partition is *safe* if the backward arcs whose extremities lie in different part can be reversed independently from the others (inside the parts). We prove that the Conflict Packing technique (a maximal collection of arc-disjoint triangles) can be used to compute such a partition.

Dense Rooted Triplet Inconsistency (k -DENSE RTI) The use of fixed parameter algorithms in computational biology and more specifically in phylogenetics has lead to efficient solutions to handle practical data set, see [17] for a survey. This evolutionary history of a set V of species is often represented by a tree (rooted or not), whose leaves represent the species of V . In this context, if we are given a set of phylogenetic trees on overlapping set of species, one would like to check whether this partial information can be combined in a common supertree [16]. The tree to be reconstructed could be unrooted or rooted. In this paper we consider the rooted setting. Then, the simplest case consists in testing whether a collection \mathcal{R} of rooted binary trees of three leaves in V , called *rooted triplets*, are *consistent*: does there exist a binary tree T on leaves V such that every triplet $\{a, b, c\}$ of \mathcal{R} is homeomorphic to the subtree of T spanning $\{a, b, c\}$? This problem can be solved in polynomial time [1]. When \mathcal{R} is not consistent, different optimization problems can be considered: removing a minimum number of leaves or removing a minimum number of triplets (see *e.g.* [10, 27]). We consider the parameterized version of the latter problem, called k -DENSE RTI,

where one is given a dense collection of rooted triplets \mathcal{R} and an integer k (the parameter) and seeks a rooted tree over V containing all but at most k triplets from \mathcal{R} . It is known that when \mathcal{R} is dense, i.e. contains exactly one rooted triplet for every triple of leaves (or vertices), then it is consistent with a binary tree if and only if it does not contain any conflict on four leaves [5, 19]. The k -DENSE RTI problem is known to be NP-complete [10] but fixed parameter tractable [18, 19], the fastest algorithm running in time $O(n^4 + 2^{O(k^{1/3} \log k)})$ [19]. Moreover, [19] provided a quadratic vertex-kernel for k -DENSE RTI. However, unlike k -FAST, no PTAS nor constant approximation algorithm is known [19]. Using *Conflict Packing* enables us to obtain a linear vertex-kernel for this problem. This result improves the best known bound of $O(k^2)$ vertices for this problem [19].

Betweenness in Tournaments (k -BETWEENNESSTOUR) In this problem one is given a set of vertices V and a dense collection \mathcal{R} of *betweenness triplets* and seeks an ordering containing all but at most k triplets from \mathcal{R} . The k -BETWEENNESSTOUR problem is NP-Complete [2] but fixed-parameter tractable [22, 26]. Using *Conflict Packing* we obtain a linear vertex-kernel for this problem, which is to the best of our knowledge the first polynomial kernel for this problem.

Outline We first illustrate the Conflict Packing technique on the k -FAST problem, proving how to compute a so-called safe partition in polynomial time (Section 2). Next, we generalize the results to the k -DENSE RTI problem (Section 3). Finally, we give another example where this technique can be applied, namely k -BETWEENNESSTOUR (Section 4).

2 Linear vertex-kernel for k -FAST

Preliminaries. Let $T = (V, A)$ be a tournament. We write uv whenever the arc of A between vertices u and v is oriented from u to v . If $V' \subseteq V$, then $T[V'] = (V', A')$ is the subtournament induced by V' , that is $A' = \{uv \in A \mid u \in V', v \in V'\}$. If $A' \subseteq A$, then $T[A'] = (V', A')$ denotes the digraph where $V' \subseteq V$ contains the vertices incident to some arc of A' . A tournament $T = (V, A)$ is *transitive* if for every triple of vertices u, v, w such that $uv \in A$ and $vw \in A$, then $uw \in A$. A *directed triangle* is a circuit of size three, i.e. a set of vertices $\{u, v, w\}$ such that $\{uv, vw, wu\} \subseteq A$.

Lemma 2.1 (Folklore) *Let $T = (V, A)$ be a tournament. Then the following properties are equivalent: (i) T is acyclic; (ii) T is transitive; (iii) T does not contain any directed triangle.*

Clearly T is transitive if and only if there exists an ordering σ on V such that for every $u \in V$ and $v \in V$ with $\sigma(u) < \sigma(v)$ (also denoted $u <_\sigma v$) then $uv \in A$. Such an ordering is called *transitive*. We use $T_\sigma = (V, A, \sigma)$ to denote a tournament whose vertices are ordered with respect to some ordering σ . An arc $vu \in A$ such that $u <_\sigma v$ is called *backward* in T_σ . In other words, T is transitive if and only if there exists a total ordering σ of its vertices such that T_σ does not contain any backward arc. Hereafter, a directed triangle will be called a *conflict*. Our kernel uses the following rule from [4].

Rule 1 (Irrelevant vertex) *Remove any vertex v that does not belong to any conflict.*

Certificate and safe partition The following definitions are adapted from notions introduced in [6]. Let $e = vu$ be a backward arc of an ordered tournament T_σ . The *span* of e is the set of vertices $\text{span}(e) = \{w \in V \mid u <_\sigma w <_\sigma v\}$. If $w \in \text{span}(e)$ is a vertex not incident to any backward arc, then $c(e) = \{u, v, w\}$ is a *certificate* of e . Observe that $c(e)$ induces a directed triangle. By convention, when speaking of an arc e of a certificate c we mean that e belongs to $T[c]$. If $F \subseteq A$ is a set of backward arcs of T_σ , we can *certify* F whenever there exists a set $c(F) = \{c(f) : f \in F\}$ of arc-disjoint certificates (i.e. for every distinct e and f of F , $|c(e) \cap c(f)| \leq 1$).

If $T_\sigma = (V, A, \sigma)$, then $\mathcal{P} = \{V_1, \dots, V_l\}$ is an *ordered partition* of T_σ if it is a partition of V and for every $i \in [l]$, V_i is a set of consecutive vertices in σ . By convention, if $i < j$, then for every $u \in V_i$ and $v \in V_j$ we have $u <_\sigma v$. We denote by $A_O = \{uv \in A \mid u \in V_i, v \in V_j, i \neq j\}$ the subset of *outer-arcs*. We say that an ordered partition $\mathcal{P} = \{V_1, \dots, V_l\}$ is a *safe partition* of an ordered tournament $T_\sigma = (V, A, \sigma)$ if A_O contains at least one backward arc and if it is possible to certify the backward arcs of $T_\sigma[A_O]$ only with outer-arcs of A_O . The following rule was central in the linear kernel of [6]:

Rule 2 (Safe partition) *Let T_σ be an ordered tournament, and $\mathcal{P} = \{V_1, \dots, V_l\}$ be a safe partition of T_σ with F the set of backward arcs of $T_\sigma[A_O]$. Then reverse all the arcs of F and decrease k by $|F|$.*

Conflict packing. Our kernelization algorithm applies the two rules above. The basic idea to identify a safe partition in polynomial time is to compute a maximal packing of arc-disjoint conflicts \mathcal{C} , called *conflict packing*. We first give a bound on the number of vertices $V(\mathcal{C})$ covered by a conflict packing \mathcal{C} . An instance of k -FAST is *positive* if there exists a set of at most k arcs whose reversal lead to a transitive tournament.

Lemma 2.2 *Let $T = (V, A)$ be a positive instance of k -FAST and \mathcal{C} be a conflict packing of T . Then $|V(\mathcal{C})| \leq 3k$.*

Proof. By definition, the conflicts of \mathcal{C} are arc-disjoint. Hence at least one arc per triangle of \mathcal{C} has to be reversed. As $|\mathcal{C}| \leq k$, \mathcal{C} covers at most $3k$ vertices. \square

We now use the maximality of a conflict packing \mathcal{C} to compute a particular ordering σ of T . Providing that $V \setminus V(\mathcal{C})$ is large enough (with respect to parameter k) we will next prove that a safe partition \mathcal{P} of T_σ can be identified.

Lemma 2.3 (Conflict Packing) *Let $T = (V, A)$ be an instance of k -FAST and \mathcal{C} a conflict packing of T . There exists an ordering of T whose backward arcs uv are such that $u, v \in V(\mathcal{C})$.*

Proof. We denote by G the set of *good* vertices, i.e. $G = V \setminus V(\mathcal{C})$. Clearly by maximality of \mathcal{C} , $T' = T[G]$ is acyclic. Observe also that for every $v \in V(\mathcal{C})$, $T[G \cup \{v\}]$ is acyclic: otherwise it would contain a conflict which is by construction arc-disjoint from those of \mathcal{C} . Let σ' be the transitive ordering of T' . For every vertex $v \in V(\mathcal{C})$, there is a unique pair of consecutive vertices u and w in σ' such that the insertion of v between u and w yields the transitive ordering of $T[G \cup \{v\}]$. The pair u, w is the *locus* of v . Consider any ordering σ on V such that: for $u, w \in G$, if $u <_{\sigma'} w$, then $u <_\sigma w$; and if $v \in V(\mathcal{C})$, then $u <_\sigma v <_\sigma w$ where the pair u, w is the locus of v . By the previous arguments, every backward arc uv of σ is such that $u, v \in V(\mathcal{C})$. \square

An ordering obtained through the above statement is a *nice* ordering. We now prove the claimed result.

Theorem 2.4 *The k -FAST problem admits a kernel with at most $4k$ vertices that can be computed in polynomial time.*

Proof. Let $T = (V, A)$ be a positive instance of k -FAST reduced under Rule 1. We greedily (hence in polynomial time) compute a conflict packing \mathcal{C} of T and let σ be a nice ordering of V . Consider the bipartite graph $B = (I \cup G, E)$ where (i) $G = V \setminus V(\mathcal{C})$, (ii) there is a vertex i_{vu} in I for every backward arc vu of T_σ and (iii) $i_{vu}w \in E$ if $w \in G$ and $\{u, v, w\}$ is a certificate of vu . Observe that any matching in B of size at least $k + 1$ would correspond to a conflict packing (i.e. a collection of arc-disjoint conflicts) of size at least $k + 1$, which cannot be. Hence a minimum vertex cover D of B has size at most k [8]. We denote $D_1 = D \cap I$ and $D_2 = D \cap G$. Assume that $|V| > 4k$. Then since $|D_2| \leq k$ and $|V(\mathcal{C})| \leq 3k$ (by Lemma 2.2), $G \setminus D_2 \neq \emptyset$. Let $\mathcal{P} = \{V_1, \dots, V_l\}$ be the ordered partition of T_σ such that every part V_i consists of either a vertex of $G \setminus D_2$ or a maximal subset of consecutive vertices (in σ) of $V \setminus (G \setminus D_2)$.

Claim 1 \mathcal{P} is a safe partition of T_σ .

Proof. Let w be a vertex of $G \setminus D_2$. By Lemma 2.3, w is not incident to any backward arc. As T is reduced under Rule 1, there must exist a backward arc $e = vu$ such that $w \in \text{span}(e)$. It follows that A_O contains at least one backward arc. Let $e = vu \in A_O$ be a backward arc of σ . By construction of \mathcal{P} , there exists a vertex $w \in (G \setminus D_2) \cap \text{span}(e)$. Then $\{u, v, w\}$ is a certificate of e and $i_{vu}w$ is an edge of B . Observe that as D is a vertex cover and $w \notin D_2$, the vertex i_{vu} has to belong to D_1 to cover the edge $i_{vu}w$. Thereby the subset $I' \subseteq I$ corresponding to the backward arcs of A_O is included in D_1 .

Finally, we argue that I' can be matched into $G \setminus D_2$ in B . Assume there exists $I'' \subseteq I'$ such that $|I''| > |N(I'') \cap (G \setminus D_2)|$. As there is no edge in B between $I \setminus D_1$ and $G \setminus D_2$ (D is a vertex cover of B), the set $D' = (D \setminus I'') \cup (N(I'') \cap (G \setminus D_2))$ is a vertex cover of B and $|D'| < |D|$: contradicting the minimality of D (see Figure 1). Thereby for every subset $I'' \subseteq I'$, we have $|I''| \leq |N(I'') \cap (G \setminus D_2)|$. By Hall's theorem [20], I' can be matched into $G \setminus D_2$.

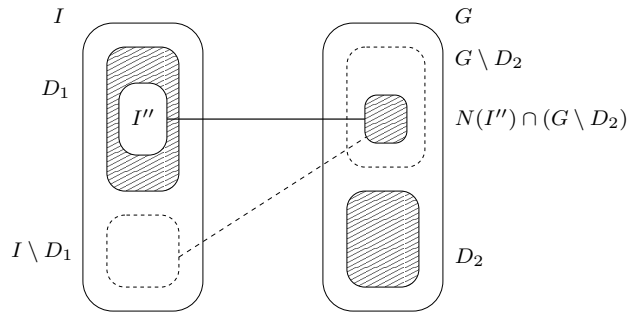


Figure 1: Illustration of the case $|I''| > |N(I'') \cap (G \setminus D_2)|$. The dashed sets represent the vertex cover D' .

As every vertex of $G \setminus D_2$ is a singleton in \mathcal{P} , the existence of the matching shows that the backward arcs of A_O can be certified using arcs of A_O only, and hence \mathcal{P} is safe. \diamond

Hence if $|V| > 4k$, there exists a safe partition that can be computed in polynomial time, and we can reduce the tournament using Rule 2. We then apply Rule 1 and repeat the previous steps until we either do not find a safe partition or $k < 0$. In the former case we know that $|V| \leq 4k$; in the latter case, we return a small trivial NO-instance. This concludes the proof. \square

3 Linear vertex-kernel for k -DENSE RTI

The kernelization algorithm for k -DENSE RTI follows the same lines than the kernelization algorithm for k -FAST. It involves two rules: the first removes *irrelevant* leaves and the second deals with a *safe partition* of the instance. The first rule was already used to obtain a quadratic kernel in [19]. As an instance of k -DENSE RTI is constituted of triplets that choose one vertex (observe that an instance of k -FAST can be seen as couples that choose one vertex), we have to adapt the notions of *conflict* and *certificate*. In k -FAST, the goal was to find an adequate ordering on the vertices of the input tournament, and a safe partition was thus defined as an ordered partition. Here, as we seek for a tree, the notion of *safe partition* needs to be adjusted. To prove our safe partition rule, we use again the technique of conflict packing presented in the previous section. We first give some definitions and notations.

Preliminaries. A *rooted triplet* t is a rooted binary tree on a set of three leaves $V(t) = \{a, b, c\}$. We write $t = ab|c$ if a and b are siblings of a child of the root of t , the other child of the root being c . We also say that t *chooses* c . An instance of k -DENSE RTI is a pair $R = (V, \mathcal{R})$, where \mathcal{R} is a set of rooted triplets on V . We only consider *dense* instances, that is \mathcal{R} contains exactly one rooted triplet for every triple of V . For a subset $S \subseteq V$, we define $\mathcal{R}[S] = \{t \in \mathcal{R} \mid V(t) \subseteq S\}$ and $R[S] = (S, \mathcal{R}[S])$. A rooted binary tree is defined *over* a set V if the elements of V are in one-to-one correspondence with the leaves of T . Hereafter the elements of V are called *leaves* and the term *nodes* stands for internal nodes of T . By $T|_S$, with $S \subseteq V$, we denote the rooted binary tree over S which is homeomorphic to the subtree of T spanning the leaves of S . Let $t \in \mathcal{R}$ be a rooted triplet and T be a tree over V . Then t is *consistent with* T if $T|_{V(t)} = t$, and *inconsistent* otherwise. A set of rooted triplets \mathcal{R} is *consistent* if there exists a rooted binary tree T over V such that every $t \in \mathcal{R}$ is consistent with respect to T . If such a tree does not exist, then \mathcal{R} is *inconsistent*. A *conflict* C is a subset of V such that $\mathcal{R}[C]$ is inconsistent. If a dense set of rooted triplets \mathcal{R} is consistent, then there exists a unique binary tree T in which every rooted triplet of \mathcal{R} is consistent. We know from [19] that:

Lemma 3.1 *Let $R = (V, \mathcal{R})$ be an instance of k -DENSE RTI. The following properties are equivalent: (i) \mathcal{R} is consistent; (ii) \mathcal{R} contains no conflict on four leaves; (iii) \mathcal{R} contains no conflict of the form $\{ab|c, cd|b, bd|a\}$ or $\{ab|c, cd|b, ad|b\}$.*

It follows that, as in k -FAST where it was enough to consider directed triangles as conflict, we can restrict our attention to conflicts on sets of four leaves. Hereafter, the term of *conflict* is only used on set of four leaves. Our kernelization algorithm uses the following rule from [19].

Rule 3 (Irrelevant leaf) *Remove any leaf $v \in V$ that does not belong to any conflict.*

Certificate. An *embedded* instance of k -DENSE RTI is a triple $R_T = (V, \mathcal{R}, T)$ such that \mathcal{R} is a dense set of rooted triplets on V and T is a rooted binary tree over V . When dealing with an embedded instance R_T , the inconsistency of a rooted triplet always refers to the tree T . If x is a node of T , then T_x denotes the subtree of T rooted in x . Given three leaves $\{a, b, c\}$, we define $\text{span}(t)$ as the set of leaves of V contained in $T_{\text{lca}(\{a, b, c\})}$, where *lca* stands for *least common ancestor*. Moreover, given $S \subseteq V$ we define $R_T[S] = (S, \mathcal{R}[S], T|_S)$. Finally, *editing* an inconsistent rooted triplet $t = ab|c$ w.r.t. T means replacing t with the rooted triplet on $\{a, b, c\}$ consistent w.r.t. T . As mentioned earlier, our kernelization algorithm only uses conflicts on sets of four leaves. The following lemma describes more precisely the topology of such conflicts.

Lemma 3.2 *Let $R_T = (V, \mathcal{R}, T)$ be an embedded instance of k -DENSE RTI. Let $\{a, b, c, d\}$ be a set of leaves such that $t = bc|a$ is the only inconsistent rooted triplet of $R_T[\{a, b, c, d\}]$. Then $\{a, b, c, d\}$ is a conflict if and only if $d \in \text{span}(t)$.*

Proof. Since $t = bc|a$ is inconsistent, $T|_{\{a, b, c\}}$ is homeomorphic to $ab|c$ or $ac|b$. The two cases are symmetric, so assume the former holds. Suppose that $d \in \text{span}(t)$. By assumption the rooted triplet $t' \in \mathcal{R}$ on $\{b, c, d\}$ is consistent with T . Consider the two possible cases for t' (observe that $t' = bc|d$ is not possible since it implies $d \notin \text{span}(t)$):

- $t' = bd|c$: observe that if t' and $bc|a$ are consistent with a tree T' , then $T'_{\{a, c, d\}}$ is homeomorphic to $cd|a$. Whereas if t' and $ab|c$ are consistent with another tree T'' , then $T''_{\{a, c, d\}}$ is homeomorphic to $ad|c$.
- $t' = cd|b$: observe that if t' and $bc|a$ are consistent with a tree T' , then $T'_{\{a, b, d\}}$ is homeomorphic to $bd|a$. Whereas if t' and $ab|c$ are consistent with another tree T'' , then $T''_{\{a, b, d\}}$ is homeomorphic to $ab|d$.

So if $d \in \text{span}(t)$, whichever choice on $\{b, c, d\}$ leads to an inconsistency. It follows that $\{a, b, c, d\}$ is a conflict. Assume now that $d \notin \text{span}(t)$. Again, as $bc|a$ is the unique rooted triplet of $R_T[\{a, b, c, d\}]$ inconsistent with T , every rooted triplet containing d chooses d . It follows that $\{a, b, c, d\}$ is not a conflict. \square

In the following, given an embedded instance $R_T = (V, \mathcal{R}, T)$ of k -DENSE RTI, a conflict containing exactly one rooted triplet inconsistent with T is called a *simple conflict*. We now formally define the notion of *certificate* for an embedded instance R_T . Let t be a rooted triplet inconsistent with T . If $d \in \text{span}(t)$ does not belong to any inconsistent rooted triplet then $c(t) = V(t) \cup \{d\}$ is a *certificate* of t . Observe that $c(t)$ induces a simple conflict. By convention, when speaking of a rooted triplet t of a certificate c we mean that t belongs to $R[c]$. If $\mathcal{F} \subseteq \mathcal{R}$ is a set of rooted triplets inconsistent with T , we can *certify* \mathcal{F} whenever it is possible to find a set $c(\mathcal{F}) = \{c(t) : t \in \mathcal{F}\}$ of *triplet-disjoint* certificates (i.e. for every distinct t and t' , $|c(t) \cap c(t')| \leq 2$).

Safe partition reduction rule. Let $R_T = (V, \mathcal{R}, T)$ be an embedded instance of k -DENSE RTI. We say that $\mathcal{P} = \{T_1, \dots, T_l\}$ is a *tree partition* of V if there exist l nodes and leaves x_1, \dots, x_l of T such that: (i) for every $i \in [l]$ $T_i = T_{x_i}$ and (ii) the set of leaves in $\cup_{i=1}^l T_{x_i}$ partition V . A tree partition of R_T naturally distinguishes two sets of rooted triplets: $\mathcal{R}_I = \{t \in \mathcal{R} \mid \exists i \in [l] V(t) \subseteq V(T_i)\}$ and $\mathcal{R}_O = \mathcal{R} \setminus \mathcal{R}_I$. Let us call a rooted triplet of \mathcal{R}_O , an *outer triplet*.

Definition 3.3 Let $R_T = (V, \mathcal{R}, T)$ be an embedded instance of k -DENSE RTI and $\mathcal{P} = \{T_1, \dots, T_l\}$ a tree partition of R_T such that \mathcal{R}_O contains at least one triplet inconsistent with T . Then \mathcal{P} is a safe partition if it is possible to certify the rooted triplets of \mathcal{R}_O inconsistent with T only with rooted triplets of \mathcal{R}_O .

We show that it is possible to reduce any embedded instance which has a safe partition.

Rule 4 (safe partition) Let $R_T = (V, \mathcal{R}, T)$ be an embedded instance of k -DENSE RTI and \mathcal{P} be a safe partition of T with \mathcal{F} the set of rooted triplets of \mathcal{R}_O inconsistent with T . Edit every rooted triplet $t \in \mathcal{F}$ w.r.t. T and decrease k by $|\mathcal{F}|$.

Lemma 3.4 The safe partition rule (Rule 4) is sound.

Proof. We use the following observation, which follows from the definition of a tree partition:

Observation 3.5 Let $\mathcal{P} = \{T_1, \dots, T_l\}$ be a tree partition of an embedded instance $R_T = (V, \mathcal{R}, T)$. Let t be a rooted triplet such that $V(t) \subseteq V(T_i)$ for some $1 \leq i \leq l$, and $l \in V \setminus V(T_i)$. Then $l \notin \text{span}(t)$.

As \mathcal{P} is a safe partition, there exists a set $c(\mathcal{F})$ of triplet-disjoint certificates for \mathcal{F} . By construction of $c(\mathcal{F})$, at least one edition has to be done for every such certificate. We prove that R_T can be made consistent by editing k of its triplets iff the instance R' obtained by editing every triplet of \mathcal{F} w.r.t. T can be made consistent by editing $k - |\mathcal{F}|$ of its triplets. Assume that the rooted triplets of \mathcal{F} have been edited as described in Rule 4. Let $C = \{a, b, c, d\}$ be a conflict of the resulting instance and let t be a rooted triplet of C inconsistent with T (suppose that $V(t) = \{a, b, c\}$). Clearly, as $t \notin \mathcal{F}$, we have $t \in \mathcal{R}_I$ and thus $\{a, b, c\}$ is a subset of leaves of some subtree T_i (with $i \in [l]$). Moreover, by Lemma 3.2, we have $d \in \text{span}(t)$, since otherwise d would not belong to any inconsistent rooted triplet in $R_T[C]$. It follows that d is also a leaf of T_i , implying that every conflict is a subset of leaves of some tree T_i of \mathcal{P} .

To conclude it suffices to observe that the edition of a rooted triplet of \mathcal{R}_I cannot create a conflict involving a rooted triplet of \mathcal{R}_O . Let t be a rooted triplet such that $V(t) = \{a, b, c\}$ is a subset of leaves of T_i . Let d be a leaf not in T_i . By Observation 3.5, $d \notin \text{span}(t)$ and the three rooted triplets of $\mathcal{R}[\{a, b, c, d\}]$ involving d are consistent with T . By Lemma 3.2, $\{a, b, c, d\}$ is not a conflict for any choice of t . This means that there exists an edition of R_T that contains the triplets of \mathcal{F} . Hence R_T has can be made consistent by editing k of its triplets iff R' can be made consistent by editing $k - |\mathcal{F}|$ of its triplets. \square

Conflict packing. The remaining problem is now to either compute in polynomial time a safe partition if one exists or bound the size of the instance with respect to k . To that end, we use the conflict packing technique as for k -FAST. Observe that the aim of a conflict packing is to provide a lower bound on the number of editions required to obtain a consistent instance. In the context of k -DENSE RTI, two conflicts may share a rooted triplet t but still require two distinct editions. To see this, let $\{a, b, c, d, e\}$ be a set of leaves and consider the following conflicts: $C = \{ab|c, ac|d, ad|b, cd|b\}$ and $C' = \{ed|c, ed|b, bc|e, bd|c\}$. Observe first that C remains a conflict for any choice of $\{b, c, d\}$. Since C and C' only have this rooted triplet in common, no edition on C' can solve C . Hence (at least) two distinct editions are require to solve both C and C' . Due to

this remark, we refine our definition of conflict packing as follows. A leaf a belonging to a conflict $\{a, b, c, d\}$ is a *seed* if $\{a, b, c, d\}$ is a conflict for any choice of $\{b, c, d\}$. A *conflict packing* is a maximal sequence of conflicts $\mathcal{C} = \{C_1, C_2, \dots, C_l\}$ such that for every $2 \leq i \leq l$:

- Either C_i intersects $\cup_{1 \leq j < i} C_j$ on at most two leaves,
- Or C_i has a unique leaf not belonging to $\cup_{1 \leq j < i} C_j$ and that leaf is a seed of C_i .

As in Section 2 we will use a conflict packing \mathcal{C} to compute a safe partition \mathcal{P} (providing that $V \setminus V(\mathcal{C})$ is large enough w.r.t. parameter k).

Lemma 3.6 *Let $R = (V, \mathcal{R})$ be a positive instance of k -DENSE RTI and \mathcal{C} be a conflict packing of R . Then $l \leq k$ and $|V(\mathcal{C})| \leq 4k$.*

Proof. Assume $\mathcal{C} = \{C_1, \dots, C_l\}$. We prove by induction on the number of conflicts l contained in \mathcal{C} that at least l editions are necessary to solve all conflicts of \mathcal{C} . If $l = 1$ then the result trivially holds. Otherwise, we know that $l - 1$ editions are necessary to solve all conflicts of $\{C_1, \dots, C_{l-1}\}$. If C_l intersects the union of C_j , $1 \leq j \leq l - 1$ in at most two leaves, then one clearly needs to do an extra edition for C_l . Otherwise, we know by definition that the unique leaf of C_l not belonging to $\cup_{1 \leq j < l} C_j$ is a seed of C_l : hence none of the editions made to solve the conflicts of $\{C_1, \dots, C_{l-1}\}$ can solve C_l . Hence $l \leq k$; since the conflicts involve four leaves, we also have $|V(\mathcal{C})| \leq 4k$. \square

Lemma 3.7 (Conflict packing) *Let $R = (V, \mathcal{R})$ be an instance of k -DENSE RTI and \mathcal{C} a conflict packing of R . There exists an embedded tree T of R such that every rooted triplet t inconsistent with T is such that $V(t) \subseteq V(\mathcal{C})$.*

Proof. The leaves of $G = V \setminus V(\mathcal{C})$ are called *good* leaves. As already observed $R[G]$ is consistent with a unique tree T' . Notice that for every leaf $a \in V(\mathcal{C})$, $R_a = R[G \cup \{a\}]$ is also consistent (otherwise \mathcal{C} would not be maximal). Thereby there exists a unique binary tree T_a such that every rooted triplet t of R_a is consistent with T_a . In other words T' contains a unique tree edge $e = xz$ which can be subdivided into xyz to attach the leaf a to node y . Hereafter the edge e will be called the *locus* of a . The maximality argument on \mathcal{C} also implies that for any pair of leaves a and b in $V(\mathcal{C})$, $R_{ab} = R[G \cup \{a, b\}]$ is consistent. If a and b have different loci, then R_{ab} is clearly consistent with the tree T obtained from T' by inserting a and b in their respective loci. It remains to consider the case where a and b have the same locus.

Let $e = xy$ be a tree edge of T' such that x is the child of y and let $B_e \subseteq V(\mathcal{C})$ be the subset of leaves whose locus is e . Given $a, b \in B_e$, we define the following binary relations $<_e$ and \sim_e on B_e as follows:

$$a <_e b \text{ if there exists } c \in G \text{ such that } ac|b \in \mathcal{R}$$

$$a \sim_e b \text{ if neither } a <_e b \text{ nor } b <_e a$$

Using the maximality of \mathcal{C} we will prove that $<_e$ is a strict weak ordering (i.e. $<_e$ is a transitive and asymmetric relation and \sim_e is transitive). This implies that the equivalence classes of \sim_e partition the leaves of B_e and are totally ordered by $<_e$.

Claim 2 *The relation $<_e$ is a strict weak ordering.*

Proof. Observe first that if $a <_e b$ then the vertex c belongs to T'_x (otherwise since R_{ab} is consistent we would have $ab|c \in \mathcal{R}$). Assume $<_e$ is not asymmetric. Then there exist two leaves $c \in G \cap T'_x$ and $d \in G \cap T'_x$ such that $\{ca|b, db|a, cd|a, cd|b\} = \mathcal{R}[\{a, b, c, d\}]$. Thereby $\{a, b, c, d\}$ is a conflict: contradicting the fact that R_{ab} is consistent for every $a, b \in B_e$. So $<_e$ is asymmetric.

Suppose we have $a, b, c \in B_e$ such that $a <_e b$ and $b <_e c$. So there exists d such that $ad|b \in \mathcal{R}$. Since d is a leaf of T_x and $<_e$ is asymmetric, we also have $bd|c \in \mathcal{R}$. Now assume that $dc|a \in \mathcal{R}$ (the case $ac|d$ is similar). Then whatever the rooted triplet on $\{a, b, c\}$ is, $\{a, b, c, d\}$ is a conflict. Hence d is a seed of the conflict $\{a, b, c, d\}$. This means that the conflict packing \mathcal{C} is not maximal: contradiction. It follows that $da|c \in \mathcal{R}$ and thereby $a <_e c$. So $<_e$ is transitive.

Suppose we have $a, b, c \in B_e$ such that $a \sim_e b$ and $b \sim_e c$. Then for every $d \in G$, $ab|d$ and $bc|d$ are rooted triplets of \mathcal{R} . Now assume that $ad|c \in \mathcal{R}$ (the case $dc|a$ is similar). Then whatever the rooted triplet on $\{a, b, c\}$ is, $\{a, b, c, d\}$ is a conflict. Hence d is a seed of the conflict $\{a, b, c, d\}$. This means that the conflict packing \mathcal{C} is not maximal: contradiction. It follows that neither $ad|c$ nor $cd|a$ belong to \mathcal{R} : thereby $a \sim_e c$ and \sim_e is transitive. \diamond

We can now describe how the tree T is build from T' . For every tree edge $e = xy$ with x a child of y such that $B_e \neq \emptyset$ we proceed as follows. Let $B_1 \dots B_q$ be the equivalence classes of \sim_e such that $B_i <_e B_j$ for $1 \leq i < j \leq q$. The tree edge e is subdivided into the path x, z_1, \dots, z_q, y . For every $i \in [q]$, if B_i contains a unique leaf a , then a is attached to node z_i . Otherwise, a new node w_i is attached to z_i and we add an arbitrary binary tree (rooted in w_i) over the leaves of B_i . We now prove that T has the desired property. Let $t = \{a, b, c\}$ be any triplet of \mathcal{R} , and assume first that $V(t) \subseteq G$. Then t is consistent by construction. Next, assume w.l.o.g. that $V(t) \cap V(\mathcal{C}) = \{a\}$: then t is consistent with T since R_a is consistent and a has been inserted to its locus. Finally, assume $V(t) \cap V(\mathcal{C}) = \{a, b\}$. If a and b have different loci then t is clearly consistent with T . Now, if a and b have the same locus e then t is consistent since a and b have been added to e according to the strict weak ordering $<_e$. It follows that any triplet of T such that $V(t) \cap G \neq \emptyset$ is consistent with T . \square

We now state the main result of this section.

Theorem 3.8 *The k -DENSE RTI problem admits a kernel with at most $5k$ vertices.*

Proof. Let $R = (V, \mathcal{R})$ be a positive instance of k -DENSE RTI reduced under Rule 3. We say that a tree T obtained through Lemma 3.7 is a *nice* tree. We greedily (hence in polynomial time) compute a conflict packing \mathcal{C} and let T be a nice tree. Consider the bipartite graph $B = (I \cup G, E)$ where:

- $G = V \setminus V(\mathcal{C})$,
- there is a vertex i_t in I for every rooted triplet t inconsistent with T and,
- $i_t g \in E$ if $a \in G$ and $\{a\} \cup V(t)$ is a certificate of t .

Observe that any matching in B of size at least $k + 1$ would correspond to a conflict packing of size at least $k + 1$, which cannot be. Hence a minimum vertex cover D of B has size at most k [8]. We denote $D_1 = D \cap I$ and $D_2 = D \cap G$.

Assume that $|V| > 5k$. Then since $|D_2| \leq k$ and $|V(\mathcal{C})| \leq 4k$ (by Lemma 3.6), $G \setminus D_2 \neq \emptyset$. Let $\mathcal{P} = \{T_1, \dots, T_l\}$ be a tree partition of R_T such that every tree T_i , $i \in [l]$, consists of either

a leaf of $G \setminus D_2$ or a connected component of $T \setminus S$ where S is the smallest spanning subtree of $(G \setminus D_2) \cup \{r\}$ (r being the root of T , see Figure 2).

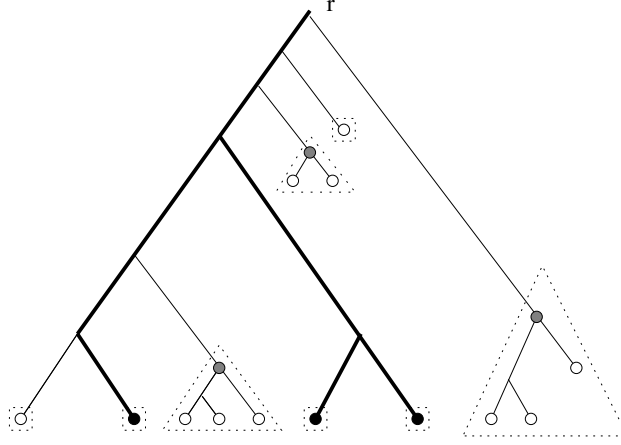


Figure 2: Illustration of the construction of \mathcal{P} . The black vertices belong to $G \setminus D_2$ and the bold edges represent S . The partition \mathcal{P} is pictured by the dotted sets, while its associated nodes u are in grey.

Claim 3 *The partition $\mathcal{P} = \{T_1, \dots, T_l\}$ is safe.*

Proof. Let a be any leaf of $G \setminus D_2$. By Lemma 3.7, a is not contained in any rooted triplet inconsistent with T . As R is reduced under Rule 3, there exists an inconsistent rooted triplet t such that $a \in \text{span}(t)$. It follows that \mathcal{R}_O contains at least one inconsistent rooted triplet.

Let $t \in \mathcal{R}_O$ be a rooted triplet inconsistent with T . By construction of \mathcal{P} , there exists a leaf $a \in (G \setminus D_2) \cap \text{span}(t)$. Then $\{a\} \cup V(t)$ is a certificate of t and $i_t a$ is an edge of B . Observe that as D is a vertex cover and $a \notin D_2$, the vertex i_t has to belong to D_1 to cover the edge $i_t a$. Thereby the subset $I' \subseteq I$ corresponding to the rooted triplets of \mathcal{R}_O inconsistent with T is included in D_1 .

Finally, we argue that I' can be matched into $G \setminus D_2$ in B . Assume there exists $I'' \subseteq I'$ such that $|I''| > |N(I'') \cap (G \setminus D_2)|$. As there is no edge in B between $I \setminus D_1$ and $G \setminus D_2$ (D is a vertex cover of B), the set $D' = (D \setminus I'') \cup (N(I'') \cap (G \setminus D_2))$ is a vertex cover of B and $|D'| < |D|$: contradicting the minimality of D .

Thereby for every subset $I'' \subseteq I'$, we have $|I''| \leq |N(I'') \cap (G \setminus D_2)|$. By Hall's theorem [20], I' can be matched into $G \setminus D_2$. As every leaf of $G \setminus D_2$ is a singleton in \mathcal{P} , the existence of the matching shows that the set of rooted triplets of \mathcal{R}_O inconsistent with T can be certified using rooted triplet of \mathcal{R}_O only, and hence \mathcal{P} is safe. \diamond

Hence if $|V| > 5k$, there exists a safe partition that can be computed in polynomial time, and we can reduce the instance using Rule 4. We then apply Rule 3 and repeat the previous steps until we either do not find a safe partition or $k < 0$. In the former case we know that $|V| \leq 5k$; in the latter case, we return a small trivial NO-instance. This concludes the proof. \square

4 Linear vertex-kernel for k -BETWEENNESSTOUR

Preliminaries. A *betweenness triplet* t defined over a set of three vertices $\{a, b, c\}$ chooses one of its vertices. We write $t = abc$ to illustrate that t chooses b . An instance of k -BETWEENNESSTOUR is a pair $B = (V, \mathcal{R})$ where \mathcal{R} is a set of betweenness triplets defined over V . We only consider *dense* instances, that is \mathcal{R} contains exactly one triplet for every triple of V . Let $t = abc \in \mathcal{R}$ be a betweenness triplet (or triplet for short) and σ be an ordering on V . Then t is *consistent* with σ if $a <_\sigma b <_\sigma c$ or $c <_\sigma b <_\sigma a$. A set of triplets \mathcal{R} is *consistent* if there exists an ordering σ on V such that every $t \in \mathcal{R}$ is consistent with σ . If such an ordering does not exist, then \mathcal{R} is *inconsistent*. A conflict C is a subset of V such that $\mathcal{R}[C]$ is inconsistent. Given an instance $B = (V, \mathcal{R})$, an *edition* for a triplet $t \in \mathcal{R}$ is a modification of its chosen vertex. A set \mathcal{F} of edited triplets of \mathcal{R} is an *edition* for B if the edition of every $t \in \mathcal{R}$ leads to a consistent instance. We use $B_\sigma = (V, \mathcal{R}, \sigma)$ to denote an instance of k -BETWEENNESSTOUR fixed under some ordering σ . For a subset $S \subseteq V$, we define $\mathcal{R}[S] = \{t \in \mathcal{R} \mid V(t) \subseteq S\}$ and $B_\sigma[S] = (S, \mathcal{R}[S], \sigma|_S)$ (i.e. the ordering σ restricted to elements of S). Finally, given an ordered instance $B_\sigma = (V, \mathcal{R}, \sigma)$ and a triplet $t = \{a, b, c\}$ such that $a <_\sigma b <_\sigma c$, *editing* t w.r.t. σ means that the choice of t is set to b . When dealing with an ordered instance the inconsistency of a triplet is always considered w.r.t. σ .

Lemma 4.1 *Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR. Then B is consistent if and only if B does not contain any conflict on 4 vertices.*

Proof. (\Rightarrow) This direction follows by definition of consistency.

(\Leftarrow) The proof is by induction on the number of vertices. Observe that for $n = 4$ the statement clearly holds. Assume that the statement holds for $n - 1$ vertices and let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR on n vertices that does not contain any conflict on 4 vertices. Let $d \in V$ be any vertex; by induction hypothesis, we know that $B_\sigma = B[V \setminus \{d\}]$ admits a (unique) consistent ordering σ . We will prove how to *insert* d in σ to obtain a consistent ordering σ_d for B . Let a, b, c be respectively the first, second and last vertex of σ . Since B_σ is consistent, $abc \in \mathcal{R}$. Moreover, since there are no conflicts on 4 vertices there is a unique way to insert d in σ to obtain an ordering σ_d such that $\mathcal{R}[\{a, b, c, d\}]$ is consistent with σ_d . There are several cases to consider: either $d <_{\sigma_d} a$ (or $c <_{\sigma_d} d$) or $a <_{\sigma_d} d <_{\sigma_d} b$ or $b <_{\sigma_d} d <_{\sigma_d} c$. In the latter case we repeat the previous steps on $\sigma|_{V \setminus \{a\}}$ (i.e. the ordering σ restraint to $V \setminus \{a\}$).

Let $a'b'c'$ be the last triplet considered in the process and assume that d is between a' and b' in σ_d (the other cases are similar). We will prove that σ_d is a consistent ordering of B . Let t be a triplet containing d (observe that the other triplets are consistent with σ_d by construction). Assume first w.l.o.g. that $V(t) = \{a', d, e\}$ with $e \notin \{a', b', c'\}$. Observe that the triplets $\{a', b', d\}$ and $\{a', b', e\}$ are consistent with σ_d by construction. This means that $a'db', \{ea'b' \vee a'b'e\} \in \mathcal{R}$: it follows that t is consistent with σ_d , since otherwise $\{a', b', d, e\}$ would be a conflict on 4 vertices. Now, assume w.l.o.g. $V(t) = \{d, e, f\}$ with $\{e, f\} \notin \{a', b', c'\}$. By the previous arguments we know that the triplets $\{a', d, e\}$, $\{a', d, f\}$ and $\{a', e, f\}$ are consistent with σ_d . It follows that t is consistent with σ_d since otherwise $\{a', d, e, f\}$ would be a conflict on 4 vertices. In all cases we have shown that σ_d does not contain any inconsistent triplet, implying that B is consistent. \square

Sunflower reduction rule. The main difference with the previous section lies in the definition of *simple conflict* for an ordered instance $B_\sigma = (V, \mathcal{R}, \sigma)$: given an inconsistent triplet t and a vertex d

that does not belong to any inconsistent triplet, we do not need to require that d belongs to $\text{span}(t)$ to obtain a conflict. As indicated by Lemma 4.3, *any* such vertex can be used to form a conflict with $V(t)$. In particular, this result allows us to replace the *Safe Partition* rule with a *Sunflower*-based reduction rule. A *sunflower* \mathcal{S} is a set of conflicts $\{C_1, \dots, C_m\}$ pairwise intersecting in exactly one triplet t . We say that t is the *centre* of \mathcal{S} .

Lemma 4.2 (Sunflower Lemma) *Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR. Let $\mathcal{S} = \{C_1, \dots, C_m\}$, $m > k$ be a sunflower of centre t . Any edition of size at most k has to edit t .*

Proof. Let \mathcal{F} be any edition of size at most k , and assume that \mathcal{F} does not contain t . This means that \mathcal{F} must contain one triplet for every conflict C_i , $1 \leq i \leq m$. Since $m > k$, we conclude that \mathcal{F} contains more than k triplets, a contradiction. \square

Observe that there exist two ways to edit the centre t . By setting $m > 2k$ we can fix this and obtain a quadratic vertex-kernel for k -BETWEENNESSTOUR (by adapting techniques from [19]). Nevertheless, this is not enough to obtain a *linear* vertex kernel. To that aim, we combine Conflict Packing and a sunflower rule on *simple conflicts*.

Lemma 4.3 *Let $B_\sigma = (V, \mathcal{R}, \sigma)$ be an ordered instance of k -BETWEENNESSTOUR. Let $\{a, b, c, d\}$ be a set of vertices such that $bca \in \mathcal{R}$ is the only inconsistent triplet of $B_\sigma[\{a, b, c, d\}]$. Then $\{a, b, c, d\}$ is a conflict.*

Proof. Since $bca \in \mathcal{R}$ is inconsistent with σ , c is not between a and b in σ . Hence we either have b between a and c or a between b and c . Assume w.l.o.g. that $a <_\sigma b <_\sigma c$ or $b <_\sigma a <_\sigma c$. The two cases are similar, so assume the former holds. By assumption, the triplet $t \in \mathcal{R}$ on $\{b, c, d\}$ is consistent with σ . Consider the three possible cases for t :

- $t = bcd$: observe that if t and bca are consistent with an ordering ρ , then w.l.o.g. $c <_\rho d <_\rho a$ or $c <_\rho a <_\rho d$ holds (the cases $a <_\rho d <_\rho c$ and $d <_\rho a <_\rho c$ are symmetric). On the other hand, if t and abc are consistent with another ordering γ , then $a <_\gamma c <_\gamma d$ holds.
- $t = cbd$: observe that if t and bca are consistent with an ordering ρ , then $d <_\rho c <_\rho a$ holds. On the other hand, if t and abc are consistent with another ordering γ , then $c <_\gamma d <_\gamma a$ or $c <_\gamma a <_\gamma d$ holds.
- $t = bdc$: observe that if t and bca are consistent with an ordering ρ , then $d <_\rho c <_\rho a$ holds. On the other hand, if t and abc are consistent with another ordering γ , then $a <_\gamma d <_\gamma c$ holds.

Since t and abc are consistent with σ , it follows that $\{a, b, c, d\}$ is a conflict for any choice of $\{b, c, d\}$. This concludes the proof. \square

Given an ordered instance $B_\sigma = (V, \mathcal{R}, \sigma)$, a triplet $t = \{a, b, c\}$ inconsistent with σ and a vertex d that does not belong to any inconsistent triplet, the set $V(t) \cup \{d\}$ is called a *simple conflict*. A sunflower $\mathcal{S} = \{C_1, \dots, C_m\}$ of B_σ is *simple* if the C_i 's are simple conflicts and if the centre of \mathcal{S} is the only triplet inconsistent with σ for every C_i , $1 \leq i \leq m$. The soundness of the Simple sunflower rule follows from Lemmas 4.2 and 4.3.

Rule 5 (Simple sunflower) Let $B_\sigma = (V, \mathcal{R}, \sigma)$ be an ordered instance of k -BETWEENNESSTOUR. Let $\mathcal{S} = \{C_1, \dots, C_m\}$, $m > k$ be a simple sunflower of centre t . Edit t w.r.t. σ and decrease k by 1.

Proof. Let \mathcal{F} be any edition of size at most k : by Lemma 4.2, \mathcal{F} must contain t . Since $|\mathcal{F}| \leq k$, there exists a conflict C_i whose only edited triplet is t . Assume that t was not edited w.r.t. σ : since no other triplet has been edited in C_i it still contains only one inconsistent triplet in $B_\sigma[C_i]$. By Lemma 4.3, it follows that C_i induces a conflict, contradicting the fact that \mathcal{F} is an edition. \square

Conflict Packing. The definition of a conflict packing \mathcal{C} , involving the notion of *seed*, is the same than the one given in Section 3. Given a conflict packing \mathcal{C} , we can compute in polynomial time an ordering σ such that any triplet t inconsistent with σ verifies $V(t) \subseteq V(\mathcal{C})$. The following result is similar to Lemma 3.6.

Lemma 4.4 Let $B = (V, \mathcal{R})$ be a positive instance of k -BETWEENNESSTOUR and \mathcal{C} be a conflict packing of T . Then $|V(\mathcal{C})| \leq 4k$.

Lemma 4.5 (Conflict Packing) Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR and \mathcal{C} a conflict packing of B . There exists an ordering whose inconsistent triplets $\{a, b, c\}$ are such that $a, b, c \in V(\mathcal{C})$.

Proof. Let $G = V \setminus V(\mathcal{C})$. Observe that $B' = B[G]$ is consistent with a (unique) ordering σ . Moreover, notice that for every vertex $a \in V(\mathcal{C})$ the instance $B_a = B[G \cup \{a\}]$ is consistent (otherwise \mathcal{C} would not be maximal). Thereby there exists a unique ordering σ_a such that every triplet of B_a is consistent with σ_a . In other words, σ contains a unique pair of consecutive vertices (u, w) such that we have $u <_{\sigma_a} a <_{\sigma_a} w$. We call such a pair (u, w) the *locus* of a . Using again the maximality argument on \mathcal{C} , we know that for any pair of vertices $a, b \in V(\mathcal{C})$ the instance $B_{ab} = B[G \cup \{a, b\}]$ is consistent. Hence if a and b have different loci then B_{ab} is clearly consistent with the ordering obtained from σ by inserting a and b in their respective loci. It remains to consider the case where a and b have the same locus. Given two consecutive vertices u and w of σ , let $B_{uw} \subseteq V(\mathcal{C})$ be the subset of vertices of $V(\mathcal{C})$ whose locus is uw . Given $a, b \in B_{uw}$ we define the binary relation $<_{uw}$ on B_{uw} as follows (observe that there are exactly two ways to add a and b w.r.t. their locus):

$$a <_{uw} b \text{ if } abw \in \mathcal{R}$$

Claim 4 The relation $<_{uw}$ is a strict total order (i.e. asymmetric and transitive).

Proof. Observe that $<_{uw}$ is asymmetric by definition. Hence it remains to prove that $<_{uw}$ is transitive. Suppose that $a, b, c \in B_{uw}$ are such that $a <_{uw} b$ and $b <_{uw} c$. This means that $abw \in \mathcal{R}$ and $bcw \in \mathcal{R}$. Now assume that $acw \notin \mathcal{R}$, i.e. w.l.o.g. that $wac \in \mathcal{R}$. Then $\{a, b, c, w\}$ is a conflict for any choice of $\{a, b, c\}$. Moreover, observe that w is a seed of the conflict $\{a, b, c, w\}$, meaning that the conflict packing \mathcal{C} is not maximal: contradiction. It follows that $acw \in \mathcal{R}$ and thereby $a <_{uw} c$. Hence $<_{uw}$ is transitive. \diamond

We now describe how the ordering σ' is built from σ . For any two consecutive vertices u and w such that $B_{uw} \neq \emptyset$ we introduce the vertices of B_{uw} according to the (strict) total order $<_{uw}$.

We now prove that σ' satisfies the desired property. Let $t = \{a, b, c\}$ be any triplet of \mathcal{R} such that $V(t) \cap G \neq \emptyset$. Observe that if t is such that $V(t) \subseteq G$ then t is consistent by construction. Next, if $|V(t) \cap G| = 2$ then t is consistent by construction. Finally, if $|V(t) \cap G| = 1$ with $a, b \in V(\mathcal{C})$, then t is consistent since B_{ab} is consistent. It follows that σ' is the sought ordering. \square

Using Lemma 4.5 and the Simple sunflower rule, we prove that the k -BETWEENNESSTOUR problem can be solved in polynomial time on instances whose parameter is such that $k < (|V|/5)$.

Theorem 4.6 *Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR such that $k < (|V|/5)$. There exists an algorithm that either computes an edition of size at most k or answers NO in polynomial time.*

Proof. Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR. We say that an ordering obtained through Lemma 4.5 is a *nice* ordering. We greedily compute a conflict packing \mathcal{C} of B and let σ be a nice ordering of B . Observe that $|V| > 5k$ (since we assume $k < (|V|/5)$) and let $G = V \setminus V(\mathcal{C})$. We know that $|V(\mathcal{C})| \leq 4k$. Hence G contains at least $k + 1$ vertices that do not belong to any triplet inconsistent with σ by construction.

Claim 5 *There exists a simple sunflower $\mathcal{S} = \{C_1, \dots, C_m\}$, $m > k$ that can be computed in polynomial time.*

Proof. Let t be any triplet inconsistent with σ and $G' \subseteq G$ be a set of $k + 1$ vertices of G . By Lemma 4.3 we know that $C_d = V(t) \cup \{d\}$ is a simple conflict for any vertex $d \in G'$. Assuming $G' = \{d_1, \dots, d_{k+1}\}$, it follows that $C_i = V(t) \cup \{d_i\}$ is a simple conflict whose only inconsistent triplet is t for every $1 \leq i \leq k + 1$. Hence $\mathcal{S} = \{C_1, \dots, C_{k+1}\}$ is a simple sunflower of centre t . \square

Using Rule 5 we have to edit the centre $t \in \mathcal{R}$ of \mathcal{S} w.r.t. to σ . Since σ still contains at least $k + 1$ vertices that do not belong to any inconsistent triplet, every inconsistent triplet of σ must be edited. Hence if σ contains at most k inconsistent triplets then editing such triplets is an edition of B and we answer YES; otherwise we answer NO. \square

As a particular consequence of Theorem 4.6 we obtain the following result.

Corollary 4.7 *The k -BETWEENNESSTOUR problem admits a kernel with at most $5k$ vertices.*

Proof. Let $B = (V, \mathcal{R})$ be an instance of k -BETWEENNESSTOUR. By Theorem 4.6, the problem can be solved in polynomial time if $k < (|V|/5)$. Hence we can assume $k \geq (|V|/5)$, which implies that $|V| \leq 5k$. \square

Conclusion

In this paper we develop a technique to design kernelization algorithms, namely *Conflict Packing*. In particular, we applied this technique to the k -FAST and k -DENSE RTI problems. Although a linear vertex-kernel was already known for k -FAST [6], our analysis gives more insights on the structure of this problem. Regarding the k -DENSE RTI problem, the Conflict Packing allows us to obtain a linear vertex-kernel, improving the previous bound of $O(k^2)$ vertices [19]. Moreover, we provide a linear

vertex-kernel for the k -BETWEENNESSTOUR problem, answering a question left open in [22]. Such a kernel may improve the parameterized complexity of the k -BETWEENNESSTOUR problem [22]. We defer this analysis to a full version of the paper. We conclude by addressing some open problems. First, observe that the simple sunflower rule together with a PTAS for k -BETWEENNESSTOUR [21] implies the existence of a linear vertex-kernel for the problem (but using a more complicated algorithm). One important remaining question is thus whether the k -DENSE RTI problem admits a constant-factor approximation algorithm? We would like to mention that such an algorithm together with the safe partition reduction rule would also imply a linear vertex-kernel for the problem. Finally, there exist a large number of problems on dense instances (see e.g. [2, 21]): we believe that our technique will yield linear vertex-kernels for a number of these problems as well.

References

- [1] A. Aho, Y. Sagiv, T. Szymansk, and J. Ullman. Inferring a tree from lowest common ancestor with an application to the optimization of relational expressions. *SIAM Journal on Computing*, 10(3):405–421, 1981.
- [2] Nir Ailon and Noga Alon. Hardness of fully dense problems. *Inf. Comput*, 205(8):1117–1129, 2007.
- [3] N. Alon. Ranking tournaments. *SIAM J. Discrete Math.*, 20(1):137–142, 2006.
- [4] N. Alon, D. Lokshtanov, and S. Saurabh. Fast FAST. In *ICALP*, volume 5555 of *LNCS*, pages 49–58. Springer, 2009.
- [5] H.-J. Bandelt and A. Dress. Reconstructing the shape of a tree from observed dissimilarity data. *Advances in Applied Mathematics*, 7:309–343, 1986.
- [6] S. Bessy, F. V. Fomin, S. Gaspers, C. Paul, A. Perez, S. Saurabh, and S. Thomassé. Kernels for feedback arc set in tournaments. In *FSTTCS*, volume 4 of *LIPICs*, pages 37–47, 2009.
- [7] H. L. Bodlaender. Kernelization: New upper and lower bound techniques. In *IWPEC*, pages 17–37, 2009.
- [8] J. A. Bondy and U. S. R. Murty. *Graph Theory with Applications*. North Holland, 1976.
- [9] D. Brügmann, C. Komusiewicz, and H. Moser. On generating triangle-free graphs. *Electronic Notes in Discrete Mathematics*, 32:51–58, 2009.
- [10] J. Byrka, S. Guillemot, and J. Jansson. New results on optimizing rooted triplets consistency. *Discrete Applied Mathematics*, 158(11):1136–1147, 2010.
- [11] P. Charbit, S. Thomassé, and A. Yeo. The minimum feedback arc set problem is NP-hard for tournaments. *Combin. Probab. Comput.*, 16(1):1–4, 2007.
- [12] M. Dom, J. Guo, F. Hüffner, R. Niedermeier, and A. Truß. Fixed-parameter tractability results for feedback set problems in tournaments. In *CIAC*, volume 3998 of *LNCS*, pages 320–331, 2006.
- [13] R. G. Downey and M. R. Fellows. *Parameterized Complexity*. Springer, 1999.

- [14] P. Erdős and J. W. Moon. On sets on consistent arcs in tournaments. *Canad. Math. Bull.*, 8:269–271, 1965.
- [15] F. V. Fomin, D. Lokshtanov, S. Saurabh, and D. M. Thilikos. Bidimensionality and kernels. In *SODA*, pages 503–510, 2010.
- [16] A.D. Gordon. Consensus super tree containing overlapping sets of labeled leaves. *Journal of Classification*, 3:31–39, 1986.
- [17] J. Gramm, A. Nickelsen, and T. Tantau. Fixed-parameter algorithms in phylogenetics. *The Computer Journal*, 51(1):79–100, 2008.
- [18] S. Guillemot and V. Berry. Fixed-parameter tractability of the maximum agreement supertree problem. *IEEE/ACM Trans. Comput. Biology Bioinform*, 7(2), 2010.
- [19] S. Guillemot and M. Mnich. Kernel and fast algorithm for dense triplet inconsistency. In *TAMC*, volume 6108 of *Lecture Notes in Computer Science*, pages 247–257. Springer, 2010.
- [20] P. Hall. On representatives of subsets. *J. London Math. Soc.*, 10(37):26–30, 1935.
- [21] M. Karpinski and W. Schudy. Approximation schemes for the betweenness problem in tournaments and related ranking problems. *CoRR*, abs/0911.2214, 2009.
- [22] M. Karpinski and W. Schudy. Faster algorithms for feedback arc set tournament, kemeny rank aggregation and betweenness tournament. In *ISAAC*, pages 3–14, 2010.
- [23] C. Kenyon-Mathieu and W. Schudy. How to rank with few errors. In *STOC*, pages 95–103, 2007.
- [24] V. Raman and S. Saurabh. Parameterized algorithms for feedback set problems and their duals in tournaments. *Theor. Comput. Sci*, 351(3):446–458, 2006.
- [25] K. D. Reid and E. T. Parker. Disproof of a conjecture of Erdős and Moser on tournaments. *J. Combin. Theory*, 9:225–238, 1970.
- [26] S. Saurabh. Chromatic coding and universal (hyper-)graph coloring families. *Parameterized Complexity News*, pages 49–58, June 2009.
- [27] C. Semple and M. Steel. *Phylogenetics*, volume 24 of *Oxford Lecture Series in Mathematics and Its Applications*. Oxford University Press, 2003.
- [28] S. Thomassé. A $4k^2$ kernel for feedback vertex set. *ACM Transactions on Algorithms*, 6(2), 2010.
- [29] A. van Zuylen, R. Hegde, K. Jain, and D. P. Williamson. Deterministic pivoting algorithms for constrained ranking and clustering problems. In *SODA*, pages 405–414, 2007.
- [30] J. Wang, D. Ning, Q. Feng, and J. Chen. An improved kernelization for P_2 -packing. *Inf. Process. Lett*, 110(5):188–192, 2010.