Conceptual vectors for NLP

MMA 2001

Mathieu Lafourcade
LIRMM - France
www.lirmm.fr/~lafourca

Objectives

- Semantic Analysis
  - Word Sense Disambiguation
  - Text Indexing in IR
  - Lexical Transfer in MT
- Conceptual vector
  - Reminiscent of Vector Models (Salton and all.) & Sowa
  - Applied on preselected concepts (not terms)
  - Concepts are not independent
- Propagation
  - on morpho-syntactic tree (no surface analysis)

Conceptual vectors

- An idea
  = a combination of concepts = a vector
- The Idea space
  = vector space
- A concept
  = an idea = a vector
  = combination of itself + neighborhood
- Sense space
  = vector space + vector set

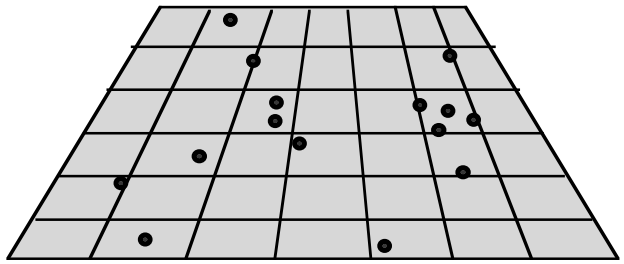

Conceptual vectors

- Annotations
  - Helps building vectors
  - Can take the form of vectors

- Set of k basic concepts — example
  - Thesaurus Larousse = 873 concepts
  - A vector = a 873 uple
  - Encoding for each dimension C = 2^{15}

Conceptual vectors

- Example : cat
  - Kernel

    c:mammal, c:stroke

    <... mammal ... stroke ...>

    <... 0,8 ... 0,8 ... >
  - Augmented

    c:mammal, c:stroke, c:zoology, c:love ...

    <... zoology ... mammal... stroke ... love ...>

    <... 0,5 ... 0,75 ... 0,75 ... 0,5 ... >
  - + Iteration for neighborhood augmentation

    Finer vectors

Vector space

- Basic concepts
  are not independent
- Sense space
  = Generator Space of a real k' vector space (unknown)
  = Dim k' <= k
- Relative position of points

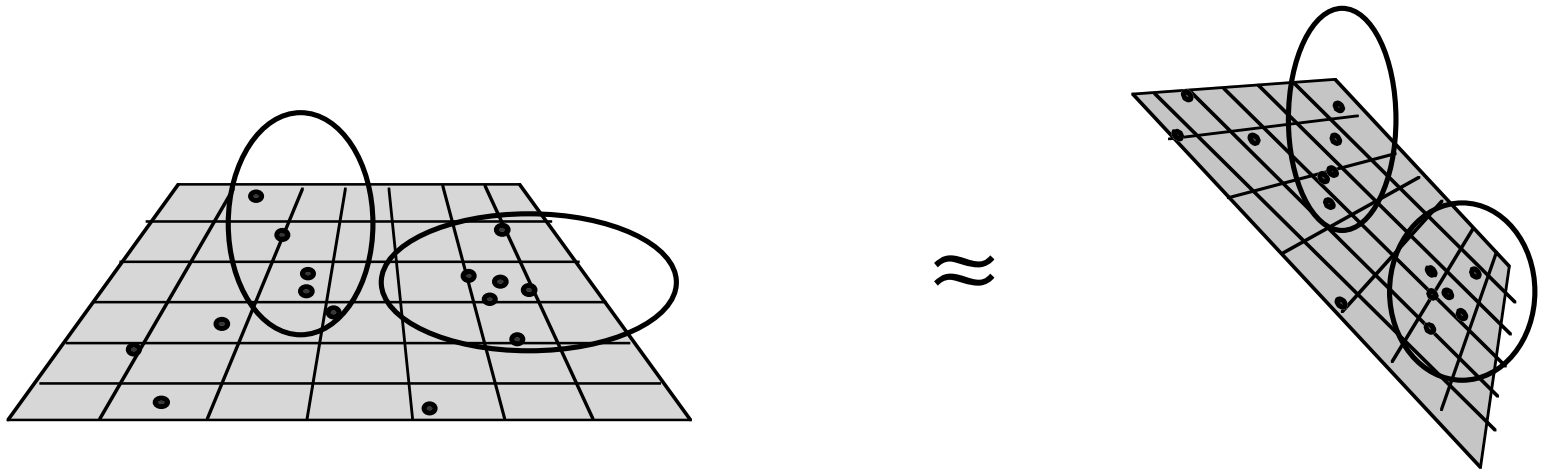

Conceptual vector distance

- Angular Distance $D_A(x, y)$ = angle (x, y)
  - $0 <= D_A(x, y) <= \pi$
  - if 0 then colinear - same idea
  - if $\pi/2$ then nothing in common
  - if π then $D_A(x, -x)$ with -x as *anti-idea* of x

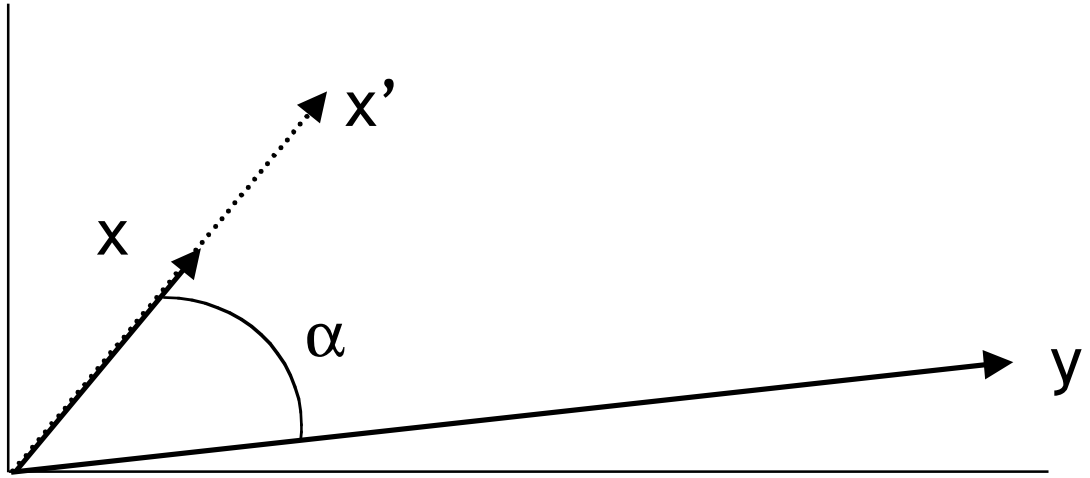

Conceptual vector distance

- Distance = acos(similarity)

$$D_A(x, y) = \text{acos}(\sqrt{((x_1y_1 + \ldots + x_ny_n)/|x||y|)})$$

$D_A(x, x) = 0$

$D_A(x, y) = D_A(y, x)$

$D_A(x, y) + D_A(y, z) \geq D_A(x, z)$

$D_A(\mathbf{0}, \mathbf{0}) = 0$ and $D_A(x, \mathbf{0}) = \pi/2$ by definition

$D_A(\alpha x, \beta y) = D_A(x, y)$ with $\alpha.\beta > 0$

$D_A(\alpha x, \beta y) = \pi - D_A(x, y)$ with $\alpha.\beta < 0$

$D_A(x+x, x+y) = D_A(x, x+y) \leq D_A(x, y)$

Conceptual vector distance

- Example
  - D_A(tit, tit) = 0
  - D_A(tit, passerine) = 0.4
  - D_A(tit, bird) = 0.7
  - D_A(tit, train) = 1.14

  - D_A(tit, insect) = 0.62

tit = kind of insectivorous passerine …

Conceptual lexicon

- Set of (word, vector) = (w, ν)*

- Monosemy

  word

  → 1 meaning

  → 1 vector

(w, ν)

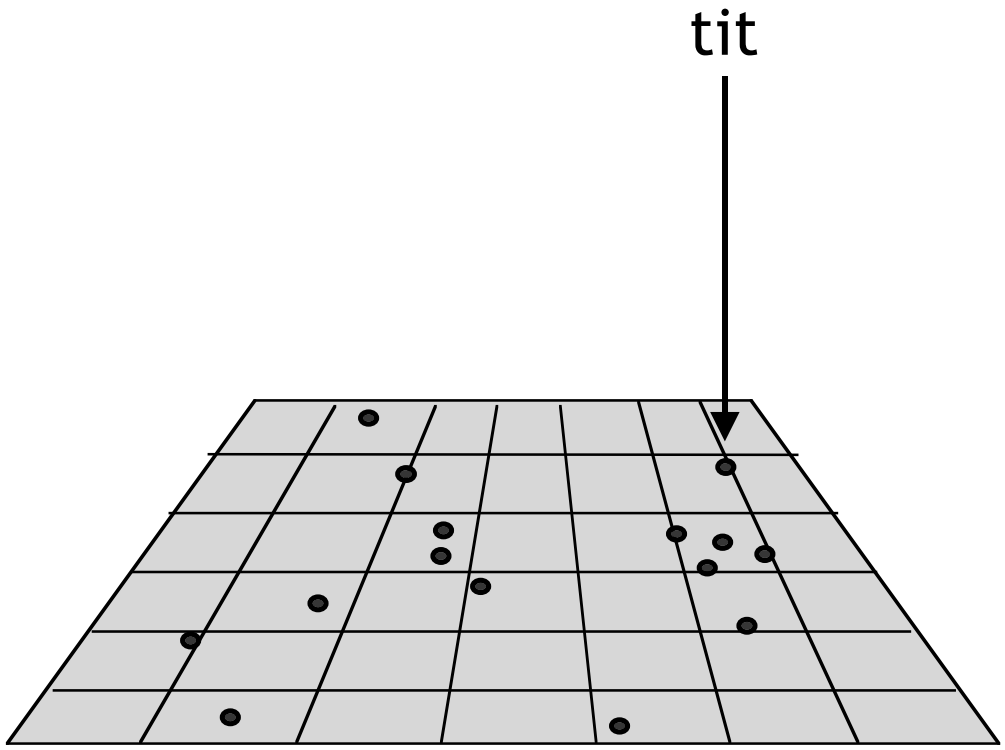

Conceptual lexicon

Polyseme building

- Polysemy

  word

  → n meanings

  → n vectors

$\{(w, \nu),$
$(w.1, \nu_1) \ldots (w.n, \nu_n) \}$

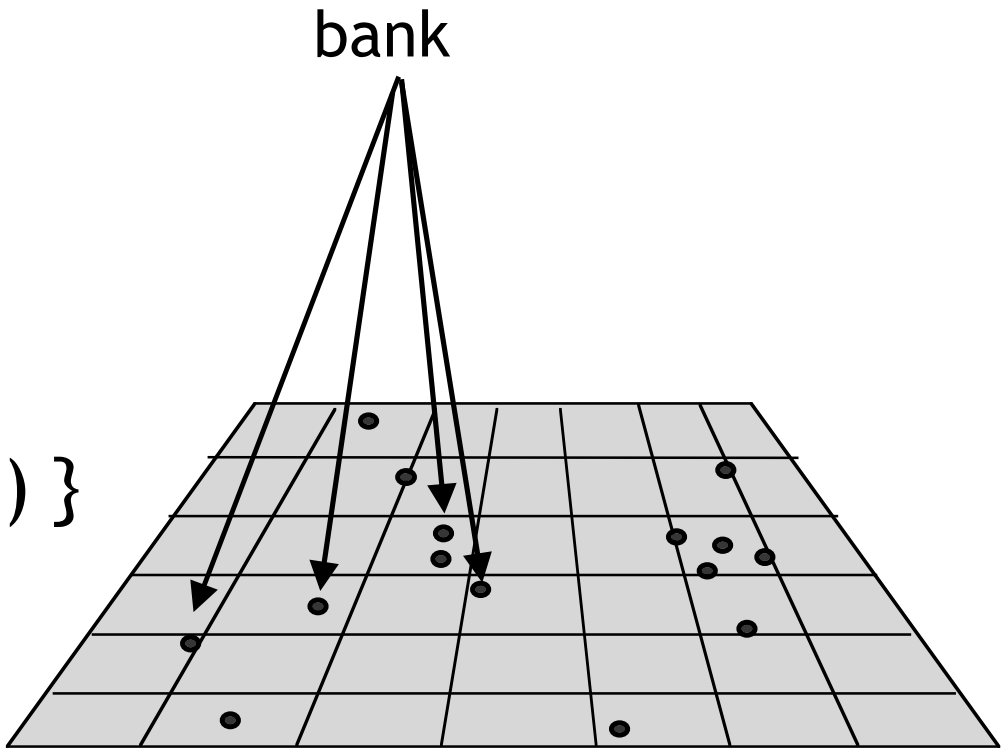

Conceptual lexicon

Polyseme building

- $\nu(w) = \sum \nu(w.i) \quad = \sum \nu.i$

- *bank* =
  - *1. Mound,*
  - *3. river border, …*
  - *2. Money institution*
  - *3. Organ keyboard*
  - *4. …*

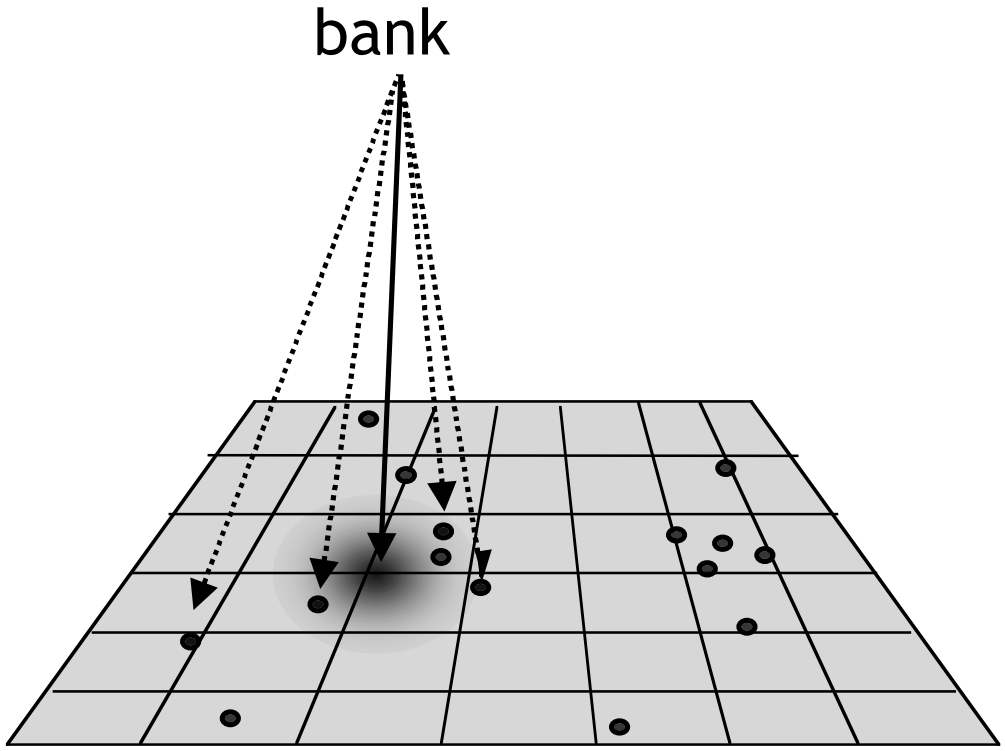

Squash isolated meanings against numerous close meanings

Conceptual lexicon

Polyseme building

- $\nu(w)$ = classification(w.i)

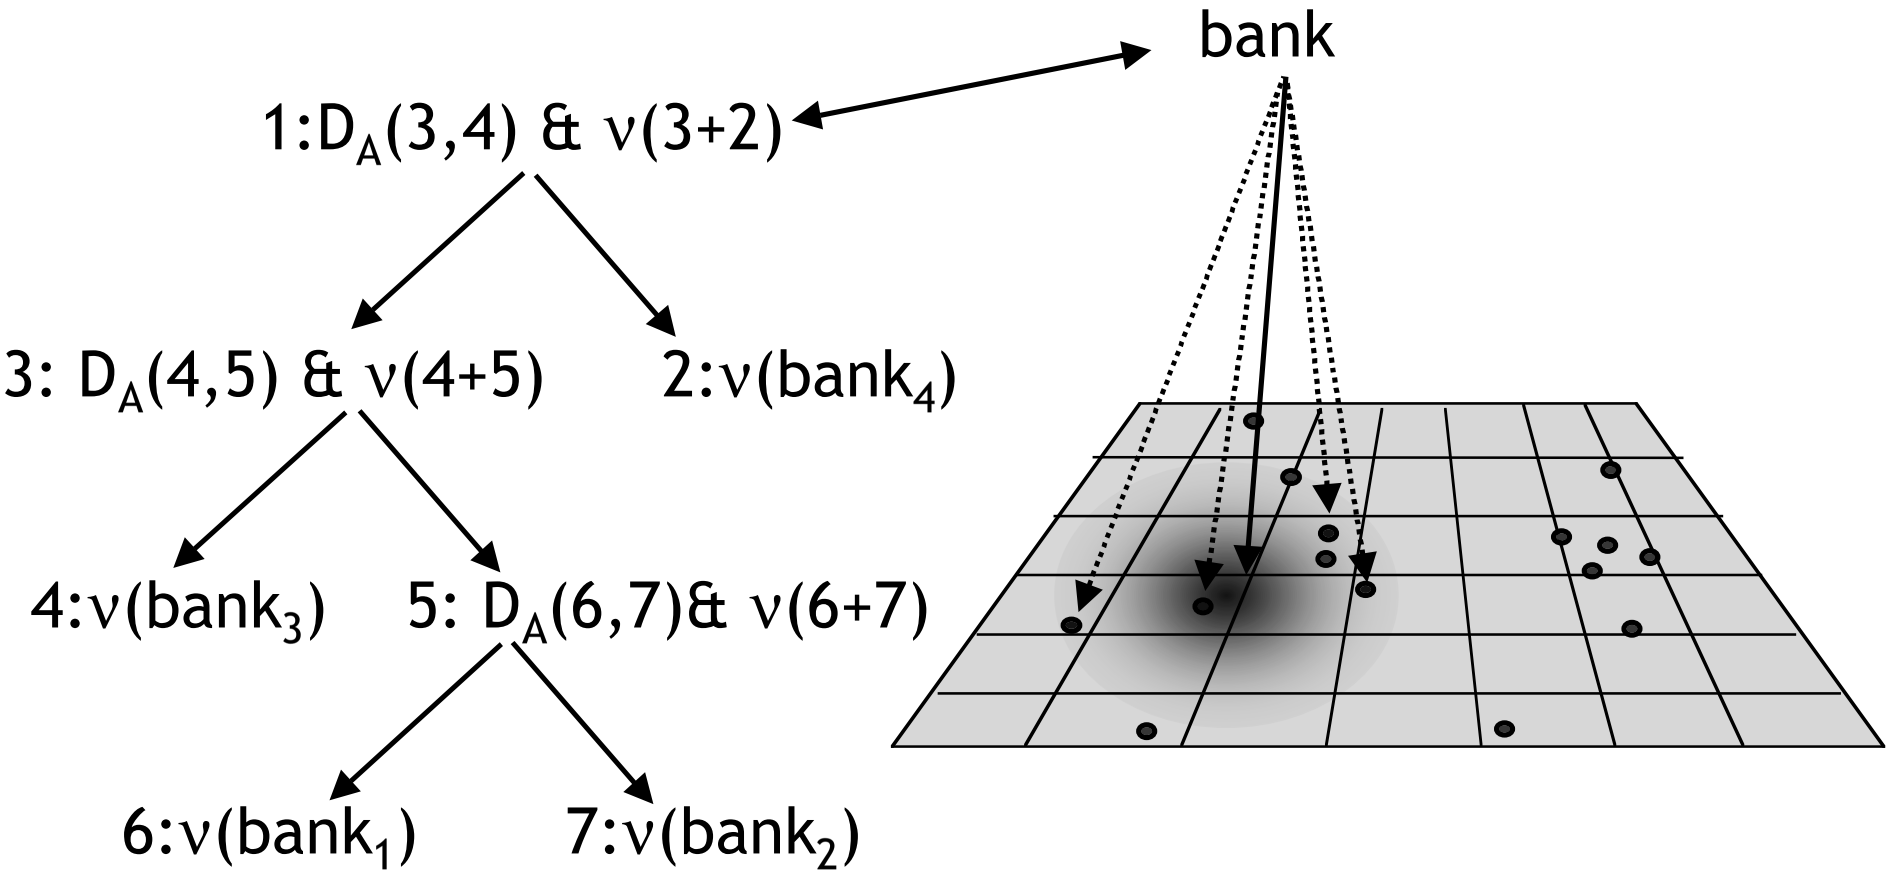

Lexical scope

- $LS(w) = LS_t(\tau(w))$

$$LS_t(\tau(w)) = 1 \qquad \textit{if } \tau \textit{ is a leaf}$$
$$LS_t(\tau(w)) = (LS(\tau_1) + LS(\tau_2)) / (2\text{-}\sin(D(\tau(w)))) \qquad \textit{otherwise}$$

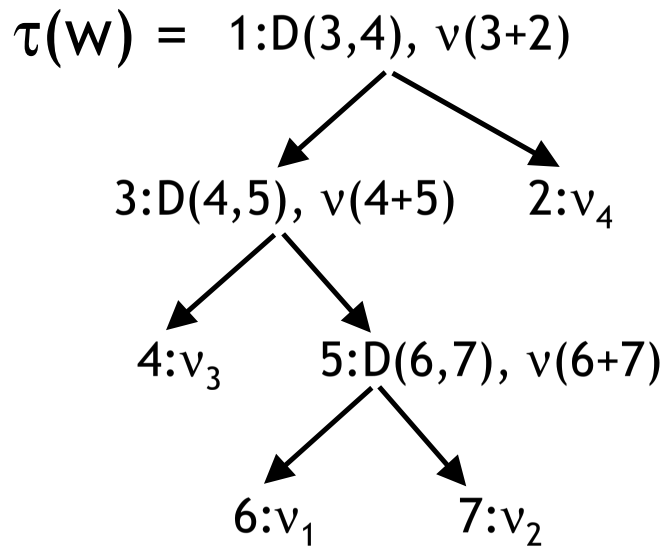

- $\nu(w) = \nu_t(\tau(w))$

$$\nu_t(\tau(w)) = \nu(w) \qquad \textit{if } \tau \textit{ is a leaf}$$
$$\nu_t(\tau(w)) = LS(\tau_1)\nu_t(\tau_1) + LS(\tau_2)\nu_t(\tau_2) \qquad \textit{otherwise}$$

Can handle duplicated definitions

Vector Statistics

- Norm (N)
  - [0 , 1] * C (2^{15}=32768)
- Intensity (I)
  - Norm / C
  - Usually I = 1
- Standard deviation (SD)
  - SD^2 = variance
  - variance = $1/n * \sum(x_i - \mu)^2$ with μ as the arith. mean

Vector Statistics

- Variation coefficient (CV)

CV = SD / mean

No unity - Norm independent

Pseudo Conceptual strength

If A Hyperonym B $\Rightarrow$ CV(A) > CV(B)

(we don't have $\Leftarrow$)

- vector « fruit juice » (N)
  - → MEAN = 527, SD = 973
- vector « drink » (N)
  - → MEAN = 443, SD = 1014

CV = 1.88

CV = 2.28

Vector operations

- Sum
  - $V = X + Y \Rightarrow v_i = x_i + y_i$
  - Neutral element : **0**
  - Generalized to *n* terms : $V = \sum V_i$
  - Normalization of sum : $v_i / |V| * c$

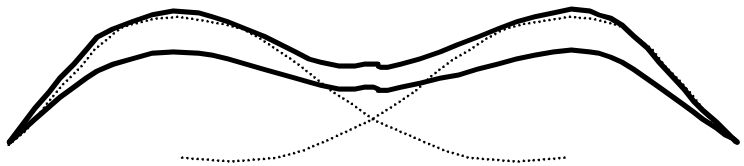

Kind of mean

Vector operations

- Term to term product
  - $V = X \otimes Y \Rightarrow v_i = x_i * y_i$
  - Neutral element : **1**
  - Generalized to *n* terms $V = \prod V_i$

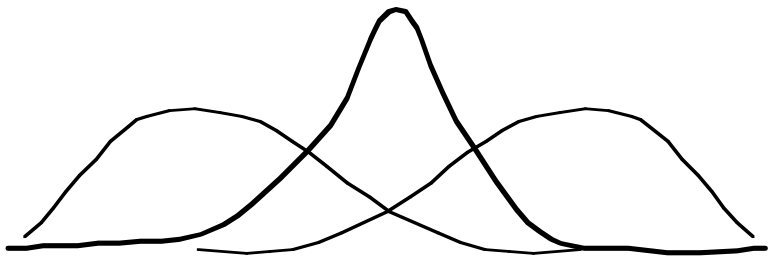

Kind of intersection

Vector operations

- Amplification
  - $V = X \hat{} n \Rightarrow v_i = sg(v_i) * |v_i| \hat{} n$

    $\sqrt{} V = V \hat{} 1/2$ and $\sqrt[n]{} V = V \hat{} 1/n$

    $V \otimes V = V \hat{} 2$ *if* $\forall v_i \geq 0$

  - Normalization of *ttm* product to *n* terms

$$V = \sqrt[n]{\prod v_i}$$

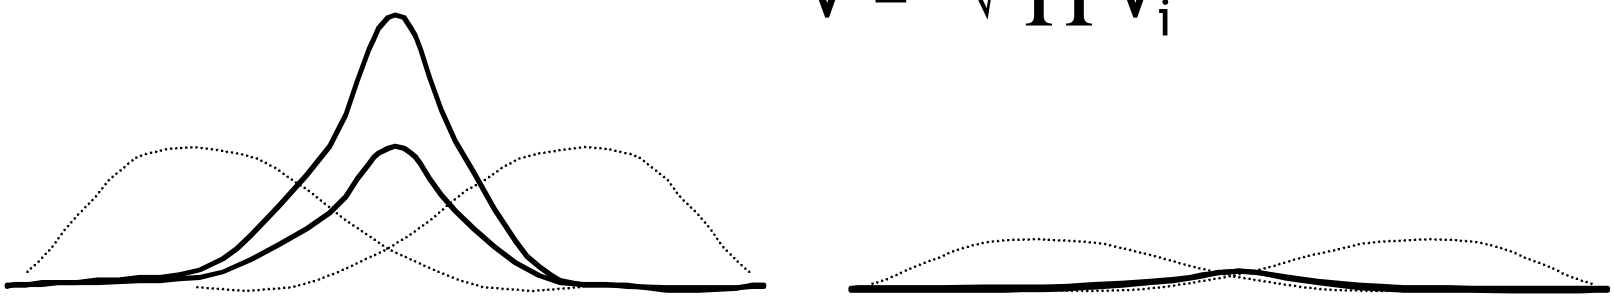

Vector operations

- Product + sum
  - $V = X \underline{\otimes} Y = (X \otimes Y) + X + Y$
  - Generalized *n* terms : $V = \sqrt[n]{\prod V_i} + \sum V_i$
  - Simplest request vector computation in IR

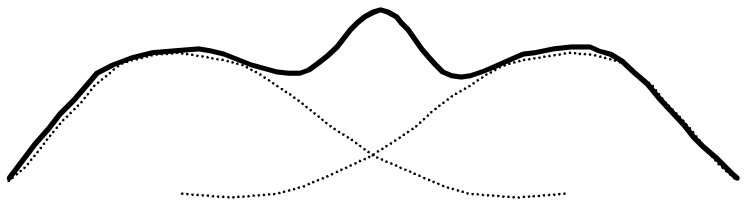

Vector operations

- Subtraction
  - $V = X - Y \Rightarrow v_i = x_i - y_i$
- Dot subtraction
  - $V = X \dot{-} Y \Rightarrow v_i = \max(x_i - y_i, 0)$
- Complementary
  - $V = C(X) \Rightarrow v_i = (1 - x_i/c) * c$
- etc.

Set operations

Intensity Distance

- Intensity of normalized *ttm* product
  - $0 \leq I(\sqrt{}(X \otimes Y)) \leq 1$ *if* $|x| = |y| = 1$

$$D_I(X, Y) = \text{acos}(I(\sqrt{} X \otimes Y))$$

  - $D_I(X, X) = 0$ and $D_I(X, \mathbf{0}) = \pi/2$

D_I(tit, tit)	= 0	(D_A = 0)
D_I(tit, passerine)	= 0.25	(D_A = 0.4)
D_I(tit, bird)	= 0.58	(D_A = 0.7)
D_I(tit, train)	= 0.89	(D_A = 1.14)
D_I(tit, insect)	= 0.50	(D_A = 0.62)

Relative synonymy

- $Syn_R(A, B, C)$ — C as reference feature

$$Syn_R(A, B, C) = D_A(A \otimes C, B \otimes C)$$

- D_A(coal,night) = 0.9
- Syn_R(coal, night, color) = 0.4
- Syn_R(coal, night, black) = 0.35

Relative synonymy

- $Syn_R(A, B, C) = Syn_R(B, A, C)$
- $Syn_R(A, A, C) = D(A \otimes C, A \otimes C) = 0$

- $Syn_R(A, B, \mathbf{0}) = D(\mathbf{0}, \mathbf{0}) = 0$
- $Syn_R(A, \mathbf{0}, C) = \pi/2$

- $Syn_A(A, B) = Syn_R(A, B, \mathbf{1})$
  $= D(A \otimes \mathbf{1}, B \otimes \mathbf{1})$
  $= D(A, B)$

Subjective synonymy

- $Syn_S(A, B, C)$ — C as point of view

$$Syn_S(A, B, C) = D(C-A, C-B)$$

$0 \le Syn_S(A, B, C) \le \pi$

normalization:

$0 \le \text{asin}(\sin(Syn_S(A, B, C))) \le \pi/2$

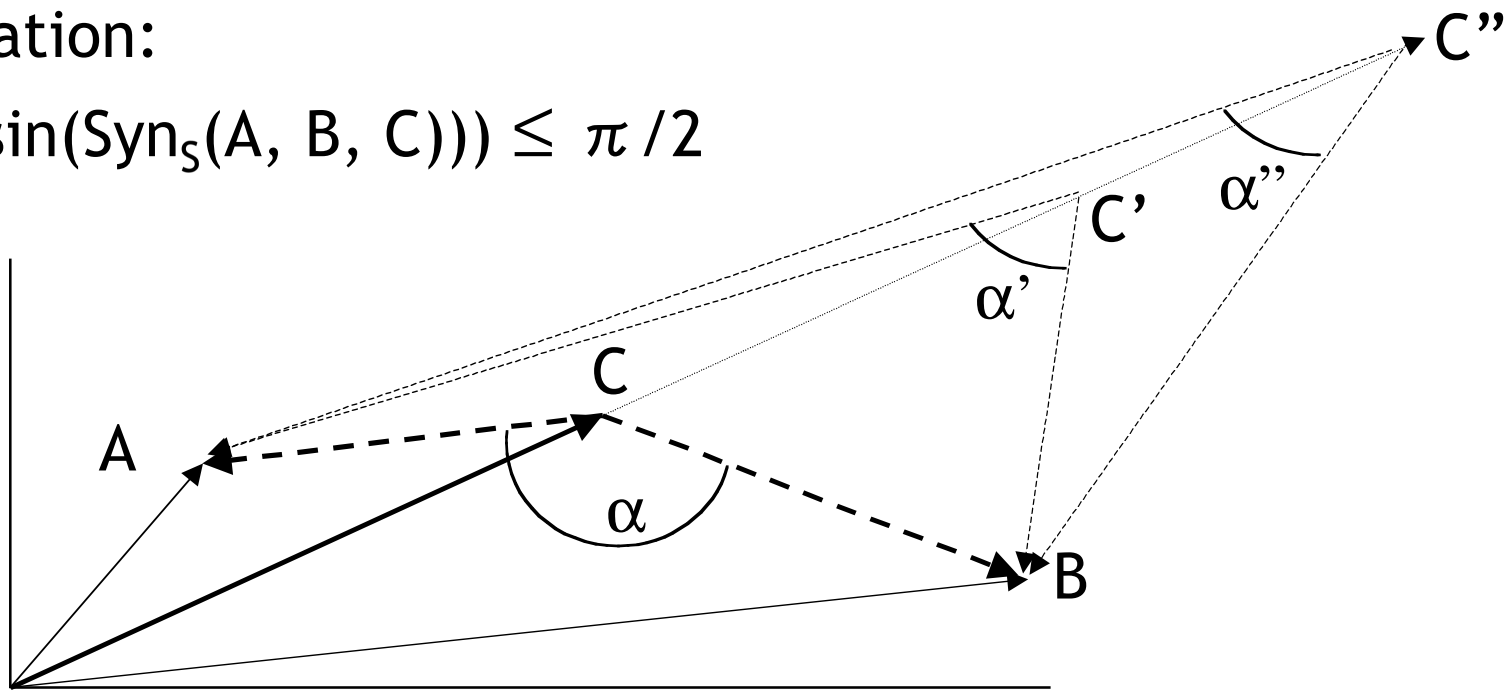

Subjective synonymy

When $|C| \rightarrow \infty$ then $Syn_S(A, B, C) \rightarrow 0$

$Syn_S(A, B, \mathbf{0}) = D(-B, -A) = D(A, B)$

$Syn_S(A, A, C) = D(C-A, C-A) = 0$

$Syn_S(A, B, B) = Syn_S(A, B, A) = 0$

- Syn_S(tit, swallow, animal) = 0.3
- Syn_S(tit, swallow, bird) = 0.4
- Syn_S(tit, swallow, passerine) = 1

Semantic analysis

- Vectors propagate on syntactic tree

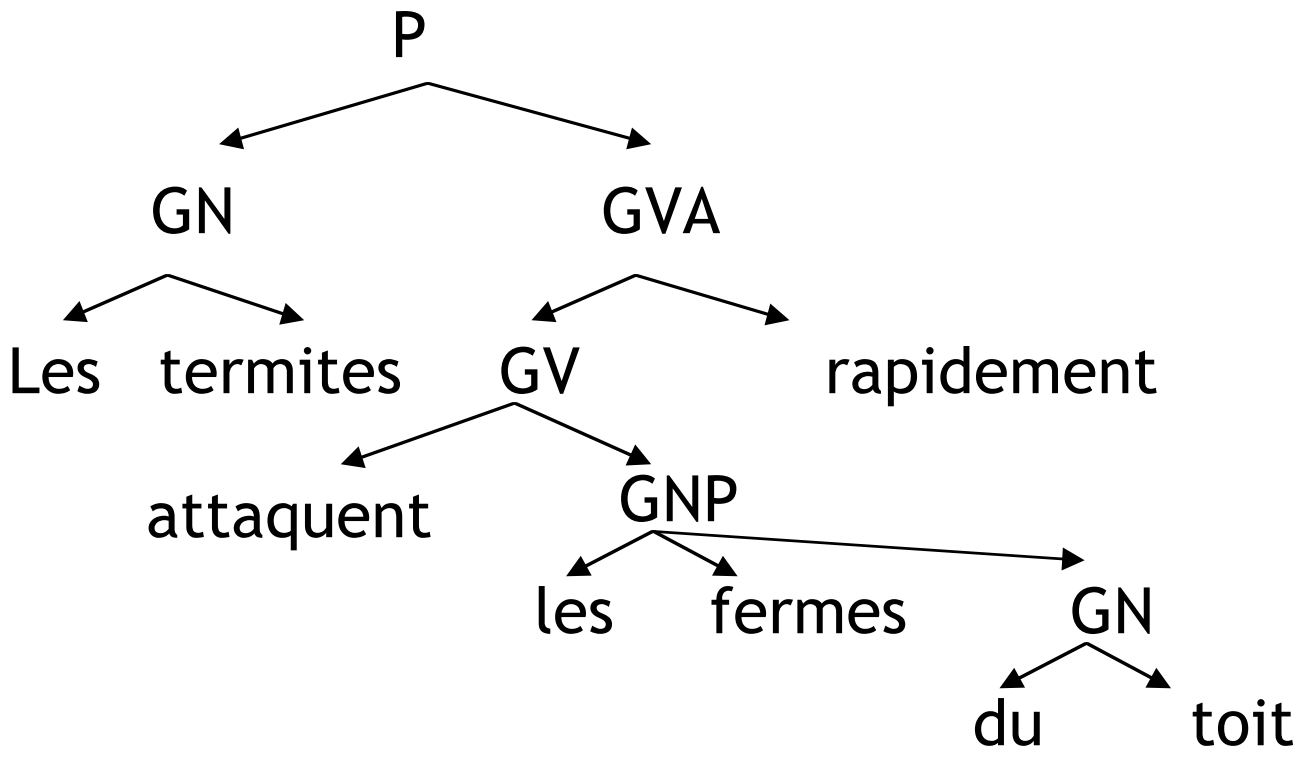

The white ants strike rapidly the trusses of the roof

Semantic analysis

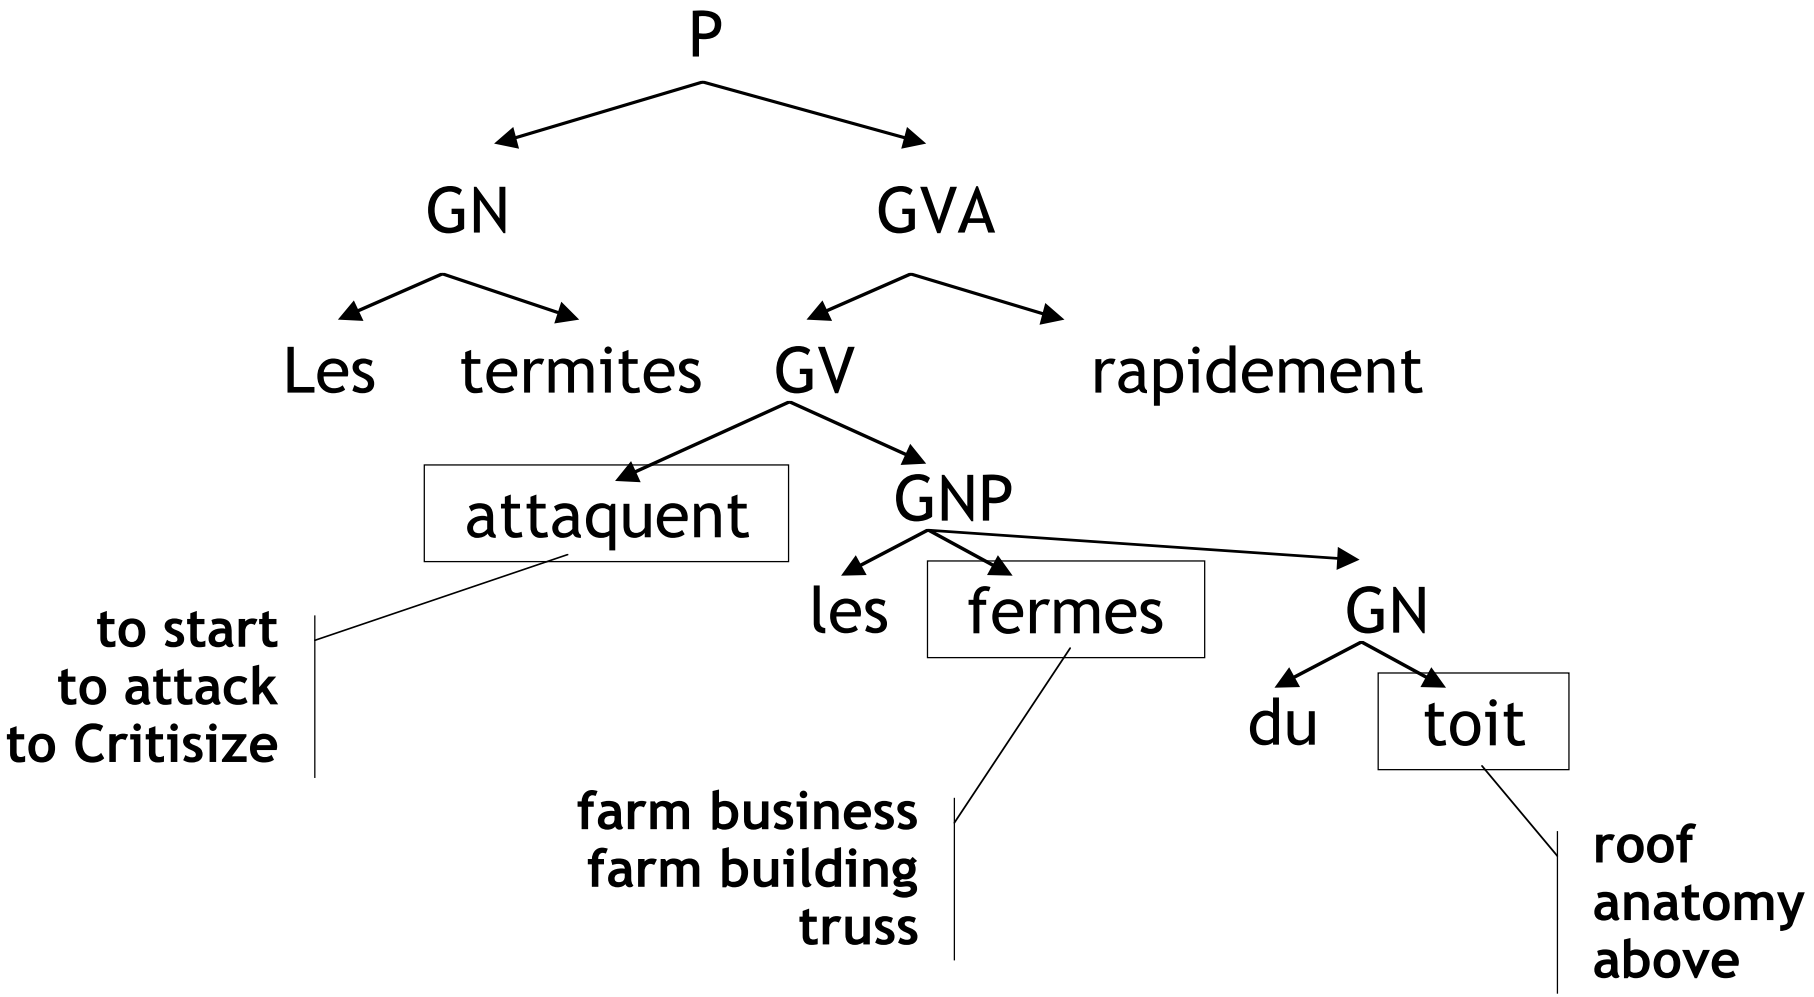

Semantic analysis

- Initialization - attach vectors to nodes

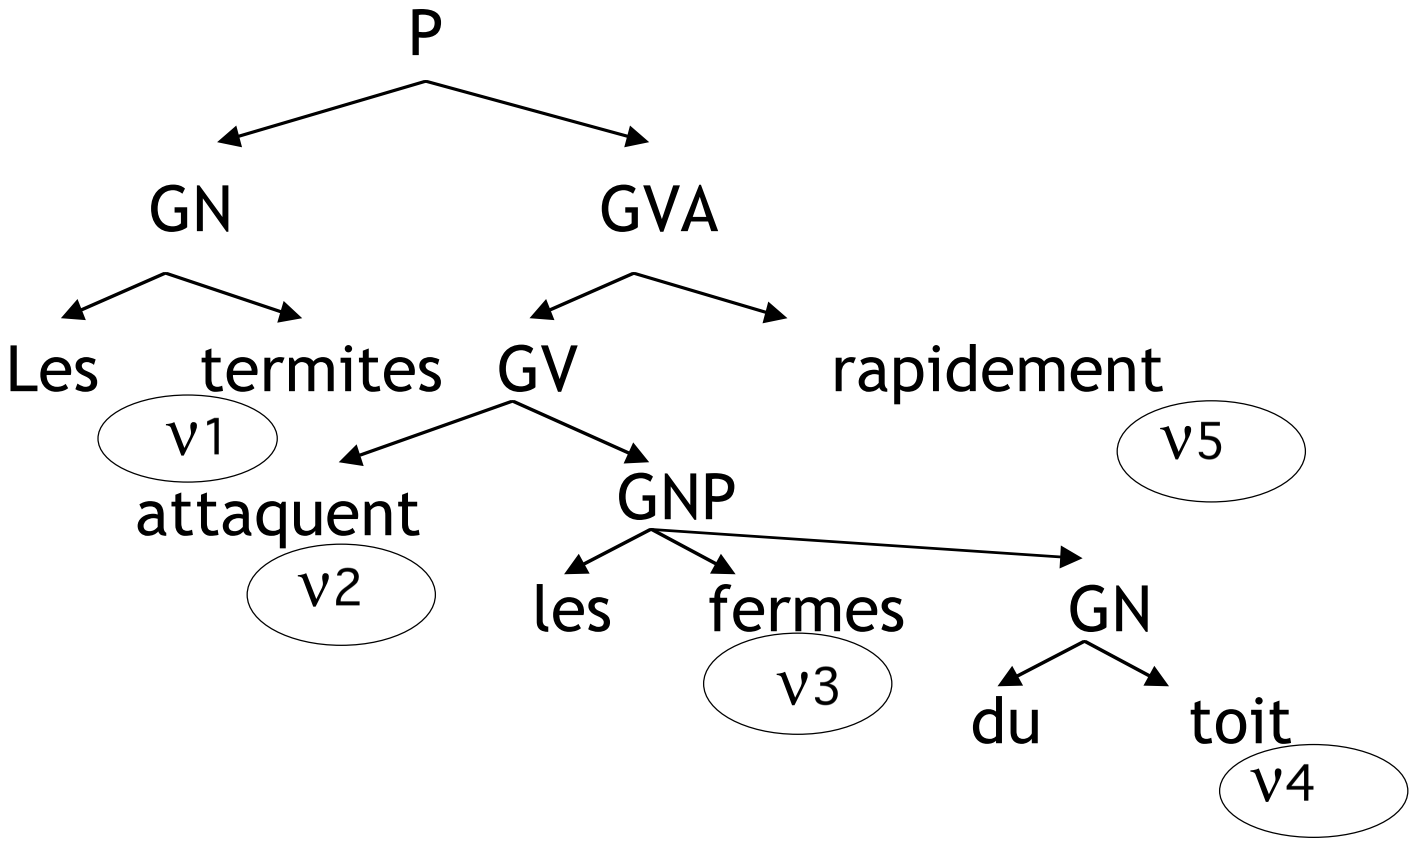

Semantic analysis

- Propagation (up)

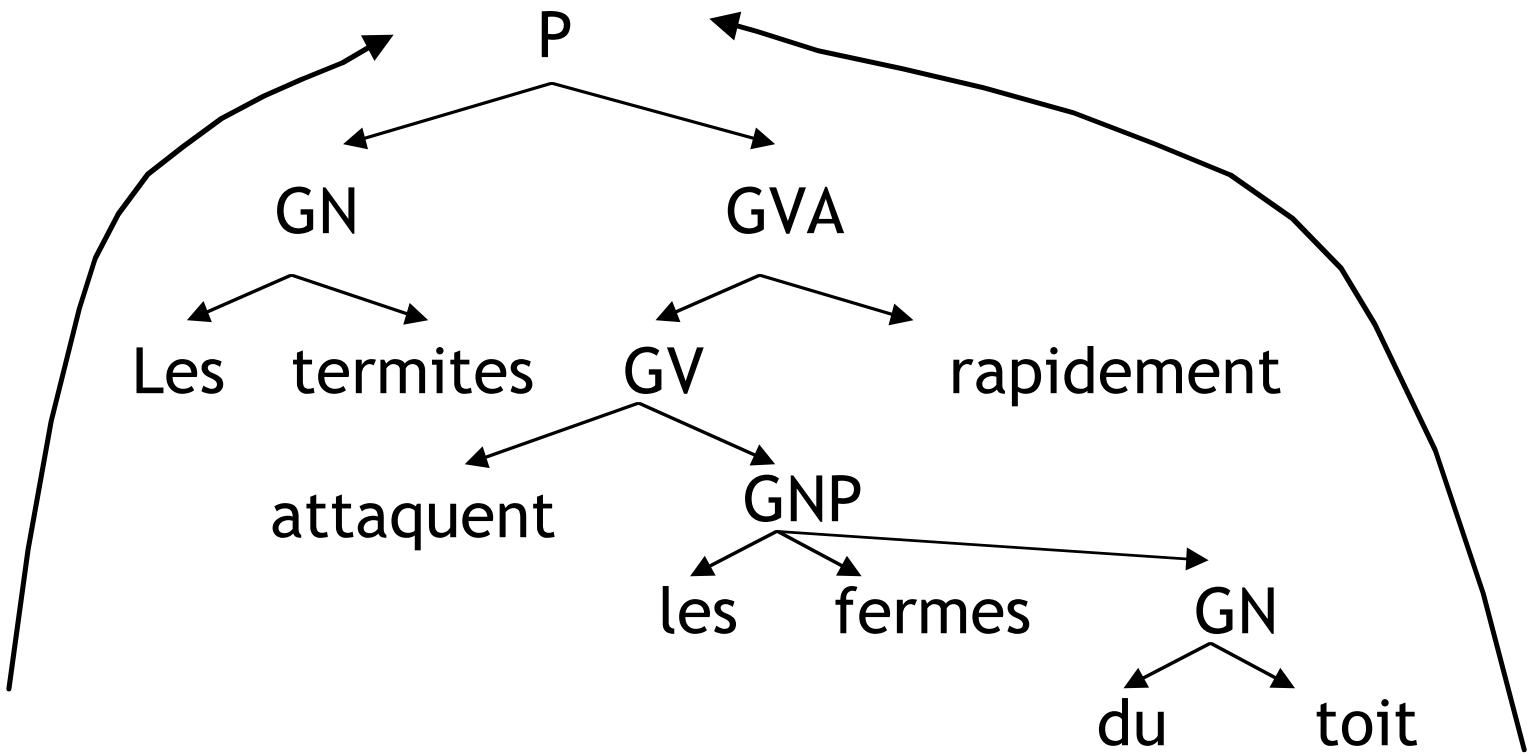

Semantic analysis

- Back propagation (down)
- $\nu(N_{i\,j}) = (\nu(N_{i\,j}) \otimes \nu(N_i)) + \nu(N_{i\,j})$

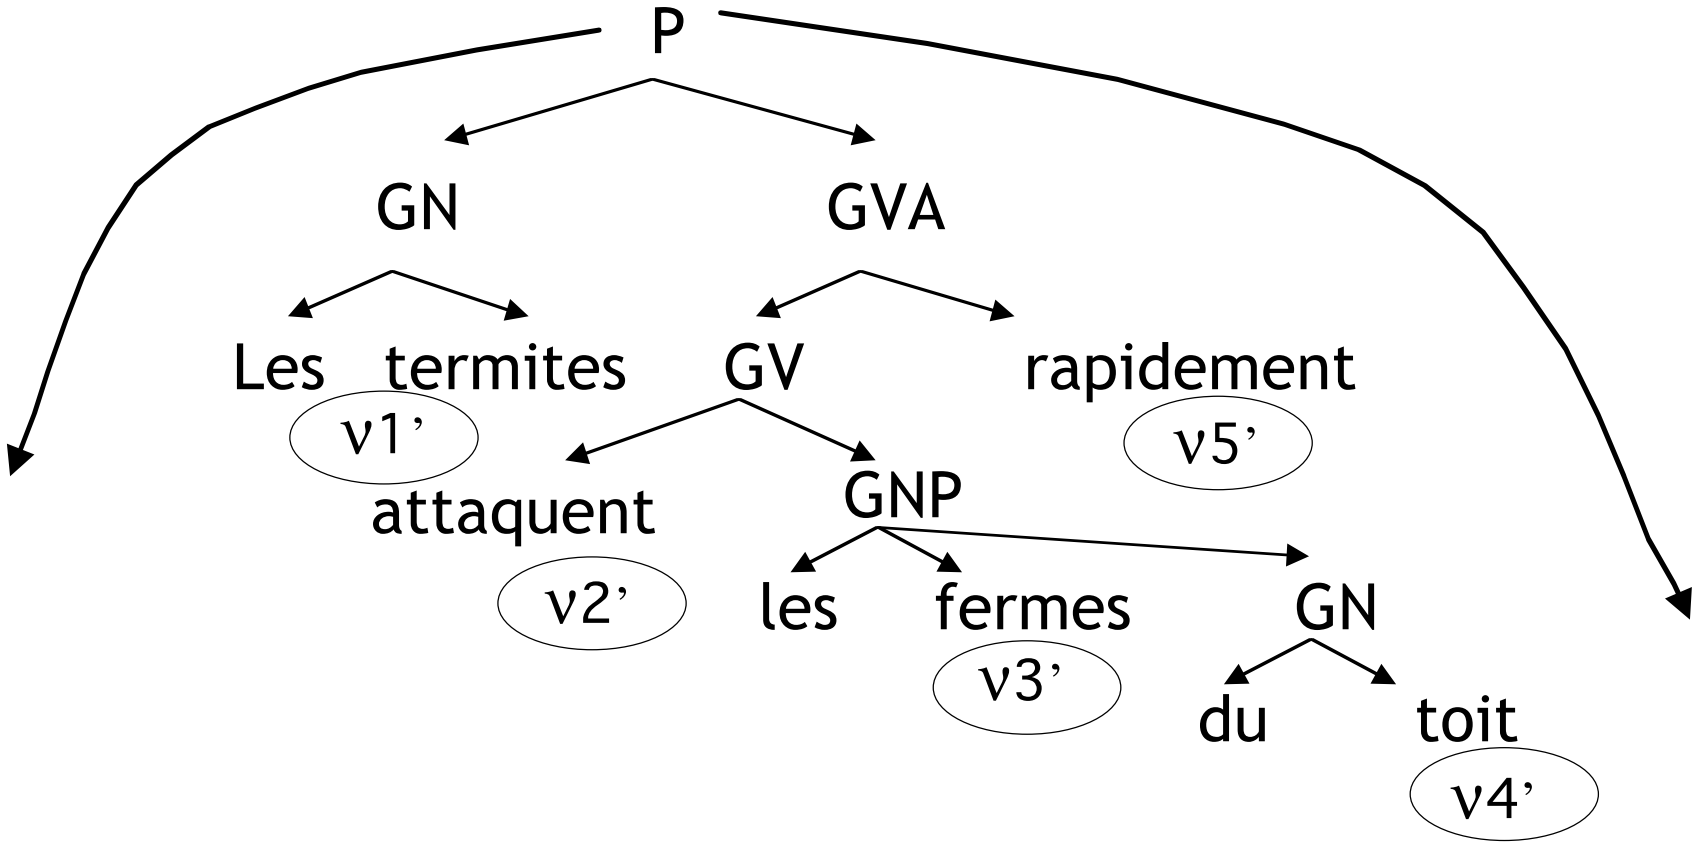

Semantic analysis

- Sense selection or sorting

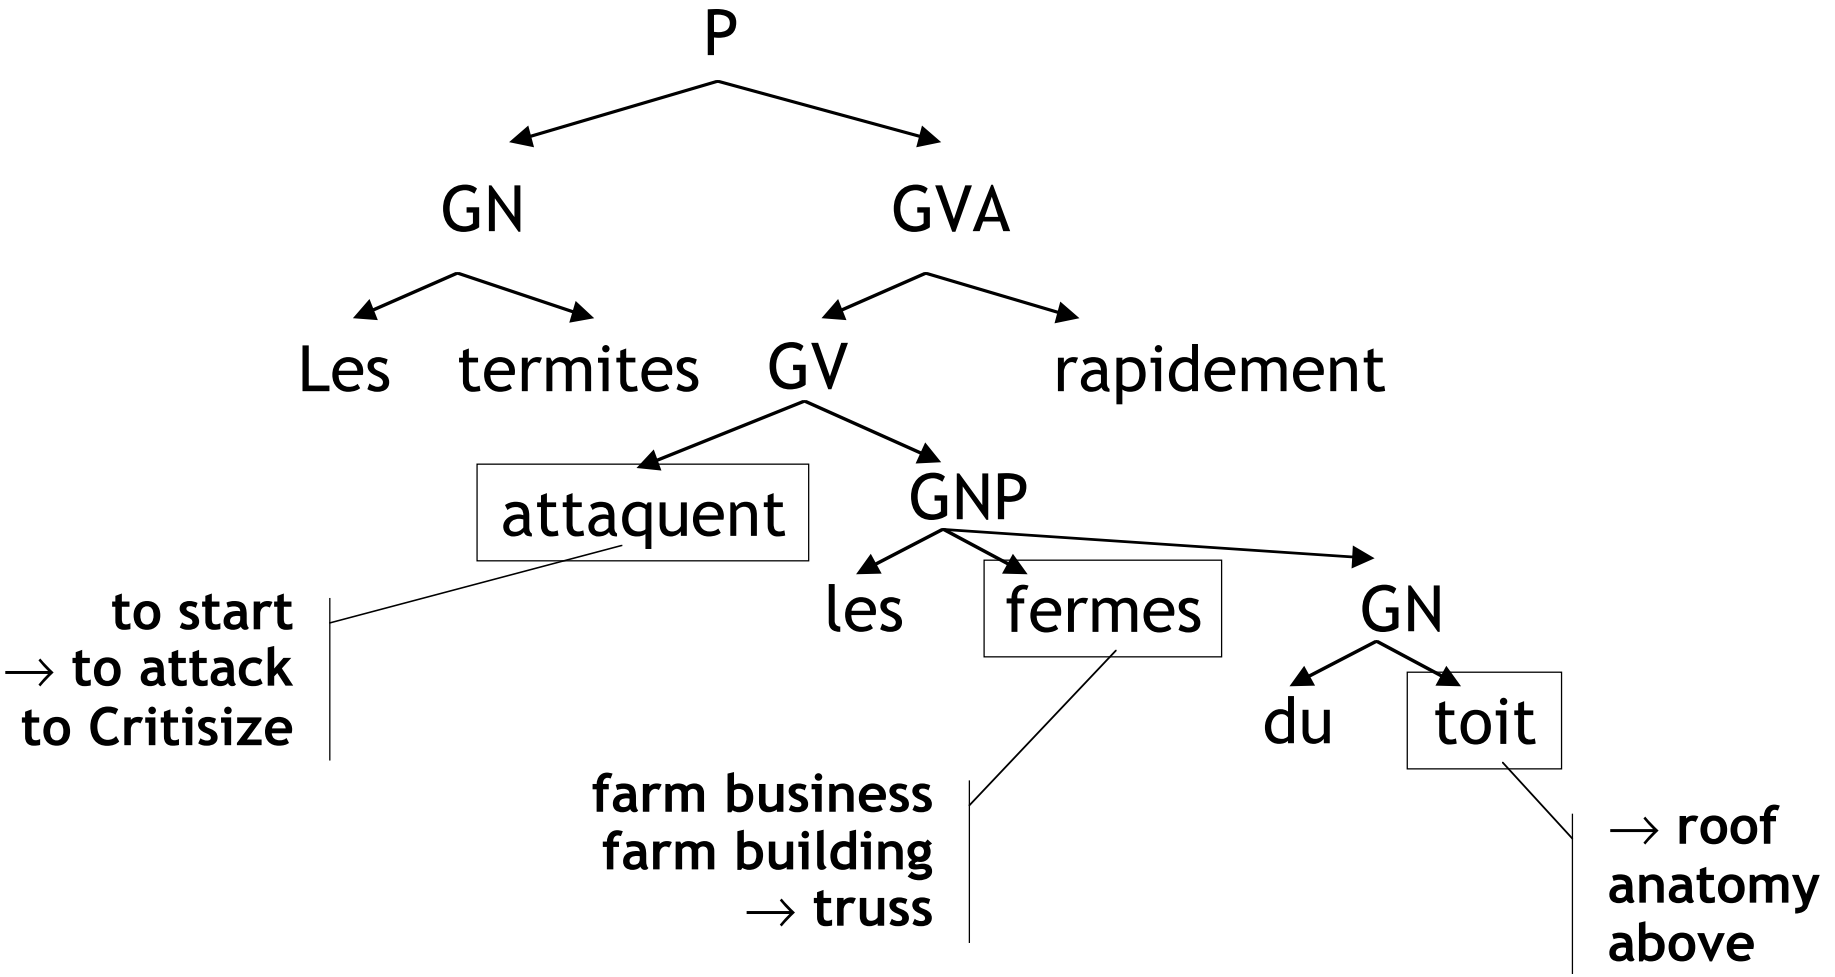

Sense selection

- Recursive descent
  - on t(w) as decision tree
  - $D_A(\nu', \nu_i)$

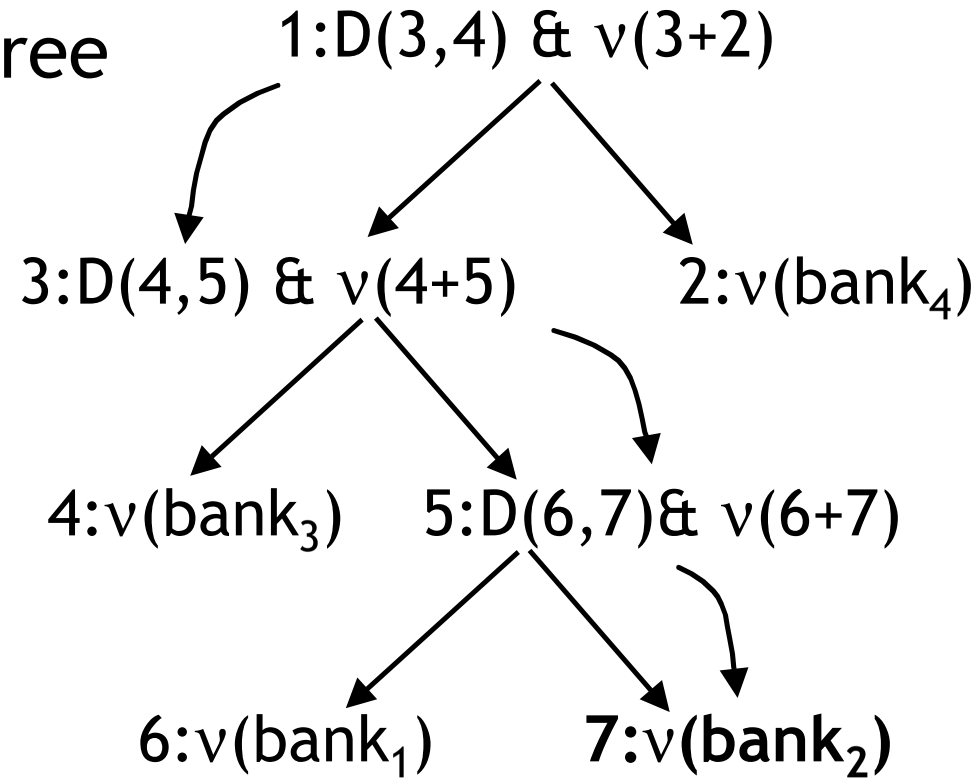

Stop on a leaf

Stop on an internal node

Vector syntactic schemas

- S: NP(ART,N)
  - → ν(NP) = V(N)

- S: NP1(NP2,N)
  - → ν(NP1) = α ν(NP1)+ ν(N) $0<\alpha<1$

ν(sail boat) = ν(sail) + 1/2 ν(boat)

ν(boat sail) = 1/2 ν(boat) + ν(sail)

Vector syntactic schemas

- Not necessary linear
- S: GA(GADV(ADV),ADJ)
  - → ν(GA) = ν(ADJ)^p(ADV)
  - p(very) = 2
  - p(mildly) = 1/2

ν(very happy) = ν(happy)^2
ν(mildly happy) = ν(happy)^1/2

Iteration & convergence

- Iteration with convergence

Local

$D(\nu_i, \nu_{i+1}) \leq \varepsilon$ *for top* ν

Global

$D(\nu_i, \nu_{i+1}) \leq \varepsilon$ *for all* ν

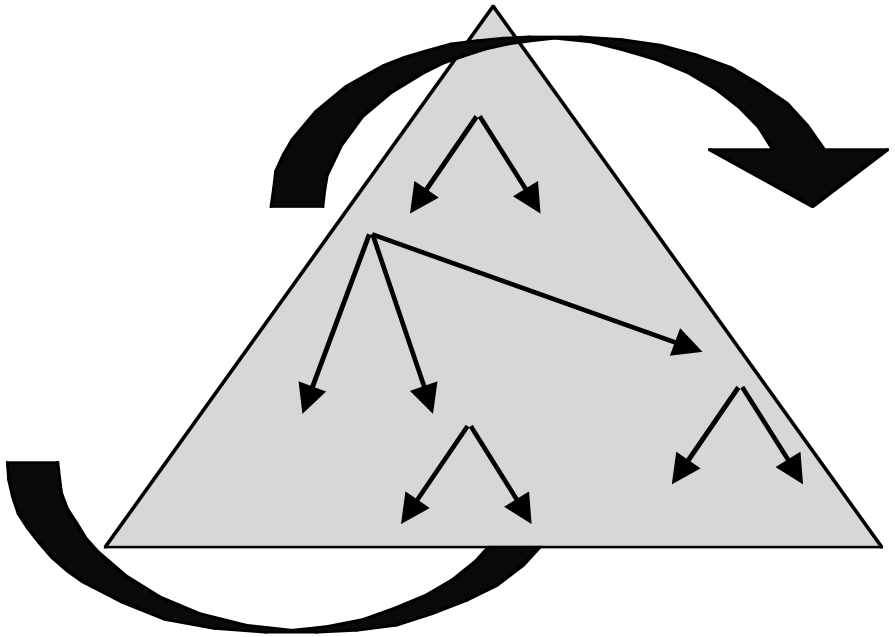

Good results but costly

Lexicon construction

- Manual kernel
- Automatic definition analysis
- Global infinite loop = learning
- Manual adjustments

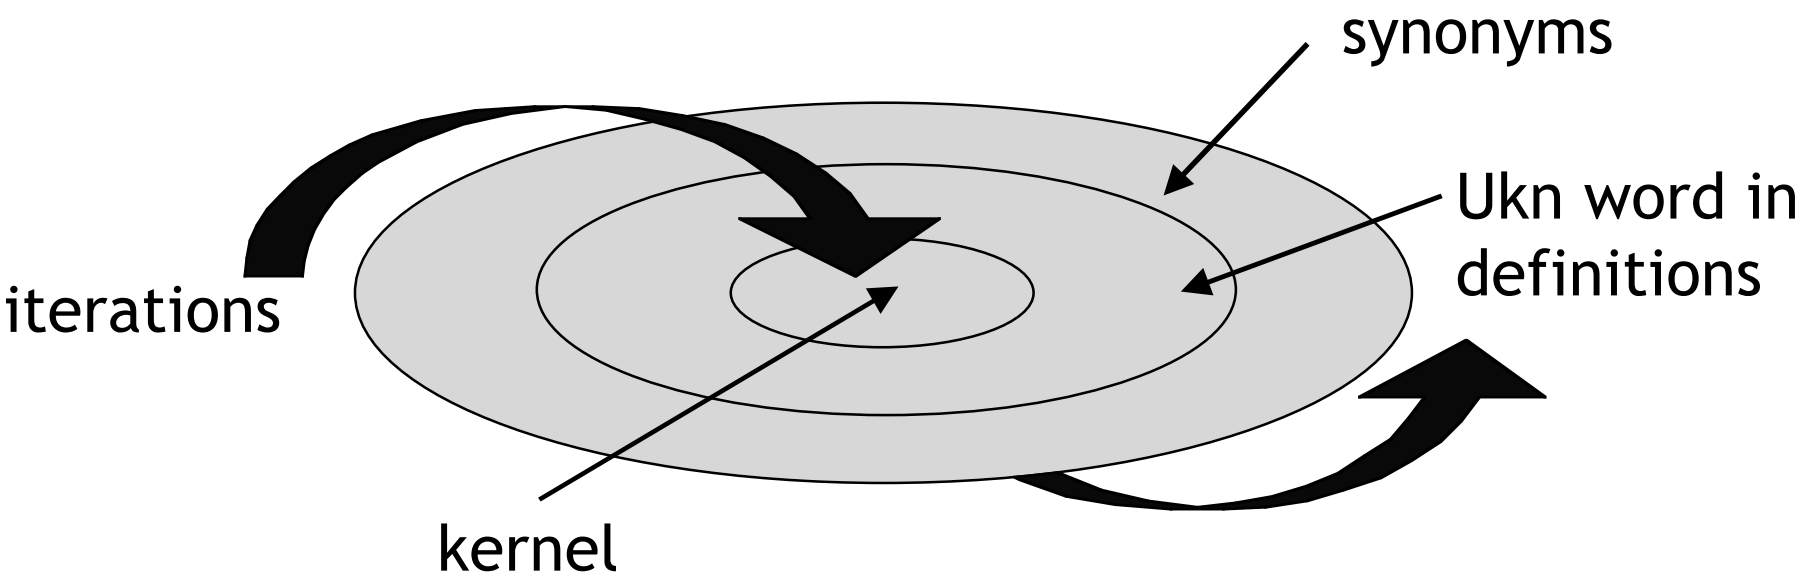

Application

machine translation

- Lexical transfer
  - $\nu_{source} \rightarrow \nu_{target}$
  - *Knn search* that minimizes $D_A(\nu_{source}, \nu_{target})$
  - Submeaning selection

    Direct

    Transformation matrix

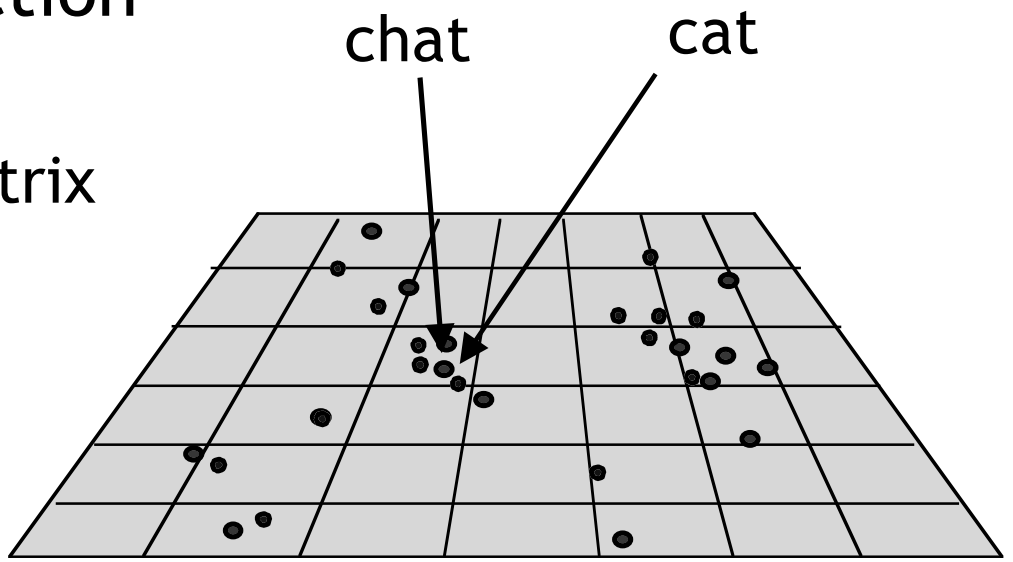

Application

Information Retrieval on Texts

- Textual document indexation
  - Language dependant
- Retrieval
  - Language independent - Multilingual
- Domain representation

  horse $\leftrightarrow$ equitation
- Granularity

  Document, paragraphs, etc.

Application

Information Retrieval on Texts

- Index = Lexicon = $(d_i , \nu_i)^*$

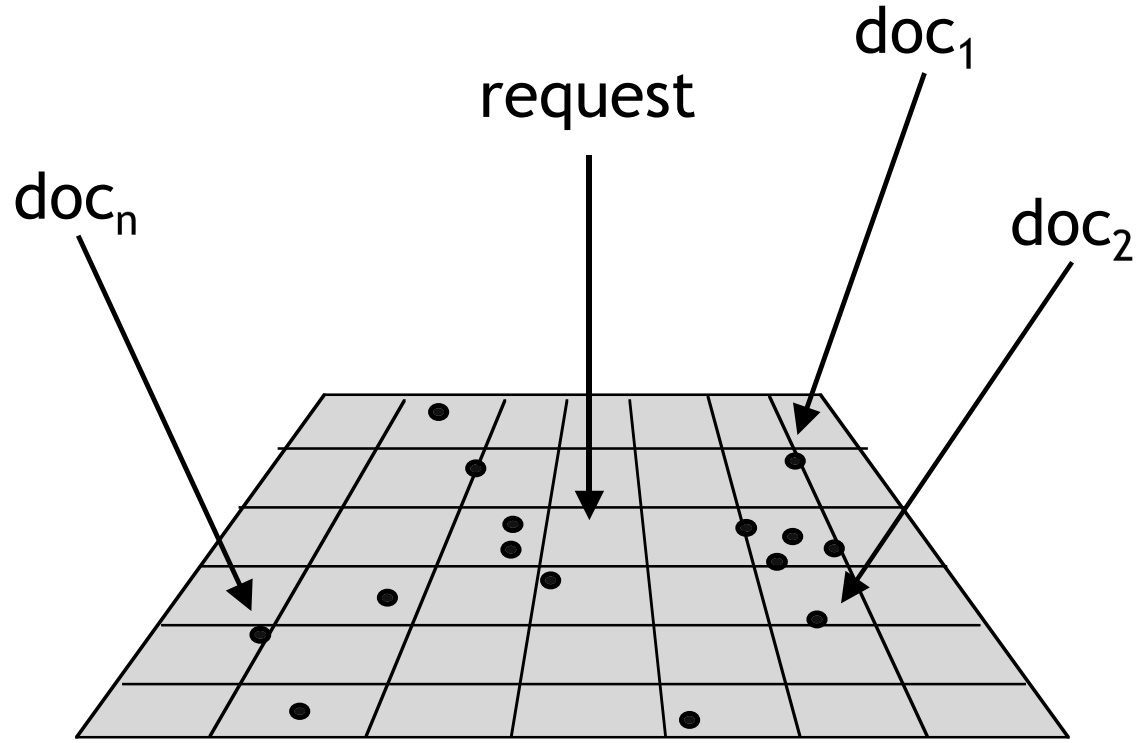

Knn search that minimizes $D_A(\nu(r), \nu(d_i))$

Search engine

Distances adjustments

- Min $D_A(\nu(r), \nu(d_i))$ may pose problems

- Especially with small documents
  - Correlation between CV & conceptual richness
  - Pathological cases
    - « plane » and « plane plane plane plane ... »
    - « inundation » $\leftrightarrow$ « blood » D = 0.85 (liquid)

Search engine

Distances adjustments

- Correction with relative intensity
  - Request vs retrieved doc (ν_r and ν_d)

$$D = \sqrt{} (D_A(\nu_r , \nu_d) * D_I(\nu_r , \nu_d))$$

  - $0 \leq I(\nu_r , \nu_d) \leq 1 \quad \rightarrow \quad 0 \leq D_I(\nu_r , \nu_d) \leq \pi /2$

Conclusion

- Approach
  - statistical (but not probabilistic)
  - thema (and rhema ?)
- Combination of
  - Symbolic methods (IA)
  - Transformational systems
- Similarity
  - Neural nets
  - With large Dim (> 50000 ?)

Conclusion

- Self evaluation
  - Vector quality
  - Tests against corpora
- Unknown words
  - Proper nouns of person, products, etc.
    - Lionel Jospin, Danone, Air France
  - Automatic learning
- Badly handled phenomena?
  - Negation & Lexical functions (Meltchuk)

End

1. extremity
2. death
3. aim
…